

FASHION

SWITCH & SOCKET



PRICE LIST

ONLY FOR VIET NAM

05.2023



COME FROM THE GERMAN THAT HAS LONG
CIVILIZATION AND FORERUNNER SCIENCE AND TECHNOLOGY





UTEN

Noble and elegant,a symbol of nobles;
Fashionable and exquisite



V3.0

Series

V3.0

Come from the German that has long civilization and forerunner science and technology



V3.0PGK11-LS 19.000 VND

16A/250V
1 gang 1 way switch size L

V3.0PGK12-LS 29.000 VND

16A/250V
1 gang 2 way switch size L



V3.0PGK11-MS 18.000 VND

16A/250V
1 gang 1 way switch size M

V3.0PGK12-MS 28.000 VND

16A/250V
1 gang 2 way switch size M



V3.0PGK11-SS 16.000 VND

16A/250V
1 gang 1 way switch size S

V3.0-PGK12-SS 26.000 VND

16A/250V
1 gang 2 way switch size S



V3.0PGK31/L 36.000 VND

16A/250V
2 gang 1 way switch size M

V3.0PGK32/L 52.000 VND

16A/250V
2 gang 2 way switch size M



V3.0PGK20A 87.000 VND

20A/250V
20a switch size S



V3.0PGK/M 31.000 VND

Door bell switch Size M



V3.0DLR 35.000 VND

Red indicator light size S



V3.0DPGK/D 95.000 VND

Multi control switch size M



V3.0PCZ13/N-MS 56.000 VND

16A/250V
3 pole multi function socket size M



V3.0PCZ2/N-SS 36.000 VND

16A/250V
2 pole socket size S

V3.0

Come from the German that has long civilization and forerunner science and technology



V3.0P-TVMS 49.000 VND

Impedance : 75Ω
 Insertion loss: VHF 3.5 dB UHF<5dB
 Flatness in Band ±1.0dB
 Tivi socket size M



V3.0P-TVSS 49.000 VND

Impedance : 75Ω
 Insertion loss: VHF 3.5 dB UHF<5dB
 Flatness in Band ±1.0dB
 Tivi socket size S



V3.0P-TELMS 49.000 VND

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIABI
 Telephone socket size M



V3.0P-TELSS 49.000 VND

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIABI
 Telephone socket size S



V3.0P-PCMS 79.000 VND

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIABI
 Connection mode T56BA, T568B
 Computer socket size M



V3.0P-PCSS 79.000 VND

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIABI
 Connection mode T56BA, T568B
 Computer socket size S



V3.0P-D/G 98.000 VND

500W/220V~
 only for filament lamp
 Dimmer control



V3.0P-D/S 98.000 VND

Working voltage : 220V~ 50Hz
 Load Power: 25-300W
 Load can be connected : Ceiling fan
 Speed control



V3.0USB 189.000 VND

Current : 2.1A
 USB socket



V3.0-LMD 11.000 VND

Fill in the blank piece size L



V3.0-PM1
Single panel with
bracket size S

19.000 VND



V3.0-PM2
Double panel with
bracket size 2S

19.000 VND



V3.0PM1.5
Middle panel with
bracket size M

19.000 VND



V3.0PM3
Triple panel with
bracket size L

19.000 VND



V3.0-C20-1
Single panel with
bracket

24.000 VND



V3.0-C20-2
Double panel with
bracket

24.000 VND



V3.0-C21
C21 panel with bracket

24.000 VND



118F/C
Waterproof box

90.000 VND



BOX/Y2
Concealed bottom box
100mm X 65mm X 50mm

24.000 VND

UTEN

Noble and elegant, a symbol of nobles;
Fashionable and exquisite



V7.0 Series

V7.0

Come from the German that has long civilization and forerunner science and technology



V7.0PGK11-LS 38.000 VND

16A/250V
1 gang 1 way switch size L

V7.0PGK12-LS 48.000 VND

16A/250V
1 gang 2 way switch size L



V7.0PGK11-MS 38.000 VND

16A/250V
1 gang 1 way switch size M

V7.0PGK12-MS 48.000 VND

16A/250V
1 gang 2 way switch size M



V7.0PGK11-SS 38.000 VND

16A/250V
1 gang 1 way switch size S

V7.0PGK12-SS 48.000 VND

16A/250V
1 gang 2 way switch size S



V7.0PGK31/L 59.000 VND

16A/250V
2 gang 1 way switch size M

V7.0PGK32/L 73.000 VND

16A/250V
2 gang 2 way switch size M



V7.0PGK20A 104.000 VND

20A/250V
20a switch size S



V7.0PGK/M 52.000 VND

16A/250V
Door bell switch Size M



V7.0DLR 55.000 VND

Red indicator light size S



V7.0PGK/D 125.000 VND

Multi control switch size M



V7.0PCZ13/N-MS 99.000 VND

16A/250V
3 pole multi function socket size M



V7.0PCZ2/N-SS 82.000 VND

16A/250V
2 pole socket size S

V7.0

Come from the German that has long civilization and forerunner science and technology



V7.0P-TVMS 82.000 VND

Impedance : 75Ω
 Insertion loss: VHF 3.5 dB UHF<5dB
 Flatness in Band ±1.0dB
 Tivi socket size M



V7.0P-TVSS 82.000 VND

Impedance : 75Ω
 Insertion loss: VHF 3.5 dB UHF<5dB
 Flatness in Band ±1.0dB
 Tivi socket size S



V7.0P-TELEMS 101.000 VND

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIABI
 Telephone socket size M



V7.0P-TELESS 101.000 VND

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIABI
 Telephone socket size S



V7.0P-PCMS 125.000 VND

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIABI
 Connector mode T56BA, T568B
 Computer socket size M



V7.0P-PCSS 125.000 VND

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIABI
 Connector mode T56BA, T568B
 Computer socket size S



V7.0P-D/G 135.000 VND

500W/220V~
 only for filament lamp
 Dimmer control



V7.0P-D/S 135.000 VND

Working voltage : 220V~ 50Hz
 Load Power: 25-300W
 Load can be connected : Ceiling fan
 Speed control



V7.0USB 209.000 VND

Current : 2.1A
 USB socket



V7.0-LMD 14.000 VND

Fill in the blank piece size L



V7.0-PM1

Single panel with bracket size S -Silver

Single panel with bracket size S- Gold


64.000 VND



V7.2-PM1

Single panel with bracket size S - Gray

35.000 VND



V7.0-PM2

Double panel with bracket size 2S- Silver

Double panel with bracket size 2S-Gold


64.000 VND



V7.2-PM2

Double panel with bracket size S - Gray

35.000 VND



V7.0-PM1.5

Middle panel with bracket size M -Silver

Middle panel with bracket size M -Gold

64.000 VND



V7.2-PM1.5

Middle panel with bracket size S - Gray

35.000 VND



V7.0-PM3

Triple panel with bracket -Silver

Triple panel with bracket -Gold

64.000 VND



V7.2-PM3

Triple panel with bracket size S - Gray

35.000 VND



V7.0-C20-1

MCB 1P panel with bracket

75.000 VND



V7.2-C20-1

MCB 1P panel with bracket - Gray

45.000 VND



V7.0-C20-2

MCB 1P panel with bracket

75.000 VND



V7.2-C20-2

MCB 2P panel with bracket - Gray

45.000 VND



V7.0-C21

C21 panel with bracket - Gray

75.000 VND



V7.2-C21

C21 panel with bracket - Gray

45.000 VND

UTEN


Noble and elegant, a symbol of nobles;
Fashionable and exquisite



V7.1 Series

V7.1

Come from the German that has long civilization and forerunner science and technology




V7.1PGK11-LS 38.000 VND

16A/250V
1 gang 1 way switch size L

V7.1PGK12-LS 48.000 VND

16A/250V
1 gang 2 way switch size L



V7.1PGK11-MS 38.000 VND

16A/250V
1 gang 1 way switch size M

V7.1PGK12-MS 48.000 VND

16A/250V
1 gang 2 way switch size M



V7.1PGK11-SS 38.000 VND

16A/250V
1 gang 1 way switch size S

V7.1PGK12-SS 48.000 VND

16A/250V
1 gang 2 way switch size S



V7.1PGK31/L 59.000 VND

16A/250V
2 gang 1 way switch size M

V7.1PGK32/L 73.000 VND

16A/250V
2 gang 2 way switch size M



V7.1PGK20A 104.000 VND

20A/250V
20a switch size S



V7.1PGK/M 52.000 VND

16A/250V
Door bell switch Size M




V7.1DLR 55.000 VND

Red indicator light size S



V7.1PGK/D 125.000 VND

Multi control switch size M



V7.1PCZ13/N-MS 99.000 VND

16A/250V
3 pole multi function socket size M



V7.1PCZ2/N-SS 82.000 VND

16A/250V
2 pole socket size S

V7.1

Come from the German that has long civilization and forerunner science and technology



V7.1-TVMS 82.000 VND

Impedance : 75Ω
 Insertion loss: VHF 3.5 dB UHF<5dB
 Flatness in Band ±1.0dB
 Tivi socket size M



V7.1-TVSS 82.000 VND

Impedance : 75Ω
 Insertion loss: VHF 3.5 dB UHF<5dB
 Flatness in Band ±1.0dB
 Tivi socket size S



V7.1-TELMS 101.000 VND

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIABI
 Telephone socket size M



V7.1-TELSS 101.000 VND

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIABI
 Telephone socket size S



V7.1-PCMS 125.000 VND

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIABI
 Connector mode T56BA, T568B
 Computer socket size M



V7.1-PCSS 125.000 VND

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIABI
 Connector mode T56BA, T568B
 Computer socket size S



V7.1-DG 135.000 VND

500W/220V~
 only for filament lamp
 Dimmer control




V7.1-DS 135.000 VND

Working voltage : 220V~ 50Hz
 Load Power: 25-300W
 Load can be connected : Ceiling fan
 Speed control



V7.1-USB 209.000 VND

Current : 2.1A
 USB socket



V7.1-USB 14.000 VND

Fill in the blank piece size L

V7.1 Come from the German that has long civilization and forerunner science and technology



V7.1PM1

Single panel with bracket size S
Plastic panel

35.000 VND



V7.1PM1.5

Middle panel with bracket size M
Plastic panel

35.000 VND



V7.1PM2

Double panel with bracket size 2S
Plastic panel

35.000 VND



V7.1PM3

Triple panel with bracket size L
Plastic panel

35.000 VND



V7.1C20-1

Single panel with bracket
Plastic panel

45.000 VND



V7.1C20-2

Double panel with bracket
Plastic panel

45.000 VND




V7.1C21

C21 panel with bracket
Plastic panel

45.000 VND

UTEN

Noble and elegant, a symbol of nobles;
Fashionable and exquisite

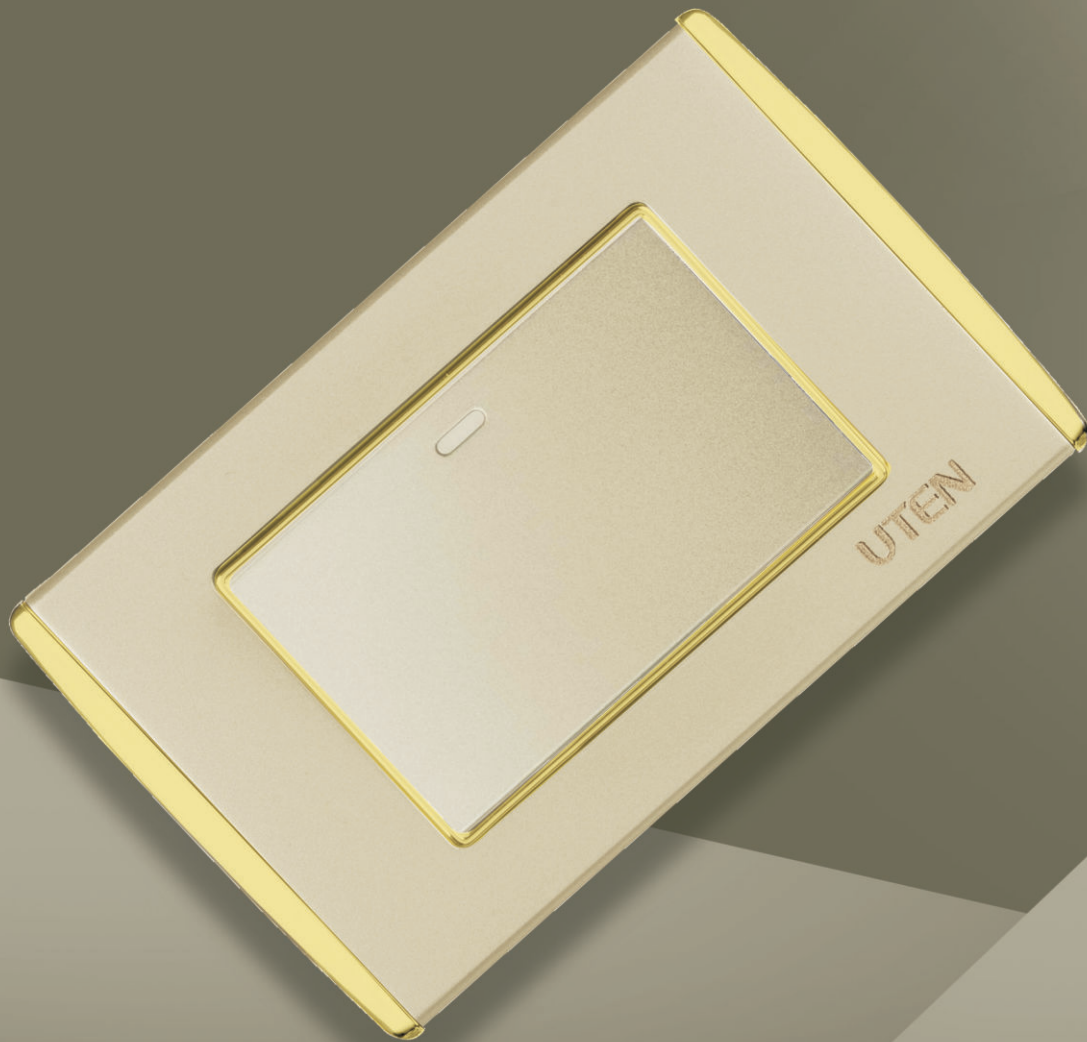

V9.1 Series

V9.1

Come from the German that has long oivilization and forerunner science and technology



V9.1PGK11-LS 57.000 VND

16A/250V
1 gang 1 way switch size L

V9.1PGK12-LS 69.000 VND

16A/250V
1 gang 2 way switch size L



V9.1PGK11-MS 57.000 VND

16A/250V
1 gang 1 way switch size M

V9.1PGK12-MS 69.000 VND

16A/250V
1 gang 2 way switch size M



V9.1PGK11-SS 57.000 VND

16A/250V
1 gang 1 way switch size S

V9.1PGK12-SS 69.000 VND

16A/250V
1 gang 2 way switch size S



V9.1PGK31/L 88.000 VND

16A/250V
2 gang 1 way switch size M

V9.1PGK32/L 109.000 VND

16A/250V
2 gang 2 way switch size M



V9.1PGK20A 156.000 VND

20A/250V
20a switch size S



V9.1PGK/M 78.000 VND

Door bell switch Size M



V9.1DLR 82.000 VND

Red indictor light size S



V9.1PGK/D 188.000 VND

Multi control switch size M



V9.1PCZ13/N-MS 148.000 VND

16A/250V
3 pole multi funciton socket size M



V9.1PCZ2/N-SS 123.000 VND

16A/250V
2 pole socket size S

V9.1

Come from the German that has long oivilization and forerunner science and technology



V9.1P-TVMS 123.000^{VND}

Impedane : 75Ω
 Insertion loss: VHF 3.5 dB UHF<5dB
 Flatness in Band ±1.0dB
 Tivi socket size M



V9.1P-TVSS 123.000^{VND}

Impedane : 75Ω
 Insertion loss: VHF 3.5 dB UHF<5dB
 Flatness in Band ±1.0dB
 Tivi socket size S



V9.1P-TELMS 151.000^{VND}

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIABI
 Telephone socket size M



V9.1P-TELSS 151.000^{VND}

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIABI
 Telephone socket size S



V9.1P-PCMS 187.000^{VND}

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIAB
 Connecton mode T56BA, T568B
 Computer socket size M



V9.1P-PCSS 187.000^{VND}

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIABI
 Connecton mode T56BA, T568B
 Computer socket size S



V9.1P-D/G 202.000^{VND}

500W/220V~
 only for filament lamp
 Dimmer control



V9.1P-D/S 202.000^{VND}

Working voltage : 220V~ 50Hz
 Load Power: 25-300W
 Load can be connected : Ceiling fan
 Speed control



V9.1USB 280.000^{VND}

Current : 2.1A
 USB socket



V9.1-LMD 20.000^{VND}

Fill in the blank piece size L



V9.1-PM1
Single panel with bracket
size S -Silver

55.000 VND



V9.1-PM1
Single panel with bracket
size S -Gold

55.000 VND



V9.1-PM2
Double panel with
bracket -Silver

55.000 VND



V9.1-PM2
Double panel with
bracket -Gold

55.000 VND



V9.1-PM3
Triple panel with
bracket -Silver

55.000 VND



V9.1-PM3
Triple panel with
bracket -Gold

55.000 VND



V9.1-PM1.5
Middle panel with
bracket size M -Silver

55.000 VND

V9.1-PM1.5
Middle panel with
bracket size M -Gold

55.000 VND



V9.1-C20-2
Double panel with bracket

65.000 VND



V9.1-C20-1
Single panel with bracket

65.000 VND



V9.1-C21
C21 panel with bracket

65.000 VND

UTEN

Noble and elegant, a symbol of nobles;
Fashionable and exquisite



V9.2 Series

V9.2 Come from the German that has long civilization and forerunner science and technology



V9.2-C20-1
Single panel with bracket

95.000 VND



V9.2-PM1
Single panel with bracket size S

85.000 VND



V9.2-C20-2
Double panel with bracket

95.000 VND



V9.2-PM2
Double panel with bracket size 2S

85.000 VND



V9.2-C21
C21 panel with bracket

95.000 VND



V9.2-PM1.5
Middle panel with bracket size M

85.000 VND



S-2Z13/N
16A/250V
2X3 pole multi function floor socket

1.230.000 VND



V9.2-PM3
Triple panel with bracket size L

85.000 VND



S-Z12/TEL/PC
Telephone+Computer
+2 pole floor socket

1.230.000 VND



S-TELPC
Telephone+Computer floor socket

1.230.000 VND

UTEN

Noble and elegant, a symbol of nobles;
Fashionable and exquisite



A8.1 Series

A8

Come from the German that has long oivilization and forerunner science and technology



A8PGK11-LS 65.000 VND

16A/250V
1 gang 1 way switch size L

A8PGK12-LS 78.000 VND

16A/250V
1 gang 2 way switch size L



A8PGK11-MS 65.000 VND

16A/250V
1 gang 1 way switch size M

A8PGK12-MS 78.000 VND

16A/250V
1 gang 2 way switch size M



A8PGK11-SS 65.000 VND

16A/250V
1 gang 1 way switch size S

A8PGK12-SS 78.000 VND

16A/250V
1 gang 2 way switch size S



A8PGK31/L 99.000 VND

16A/250V
2 gang 1 way switch size M

A8PGK32/L 115.000 VND

16A/250V
2 gang 2 way switch size M



A8PGK20A 179.000 VND

20A/250V
20a switch size S



A8PGK/M 79.000 VND

Door bell switch Size M



A8DLR 95.000 VND

Red indictor light size S



A8DPGK/D 189.000 VND

Multi control switch size M



A8PCZ2/N-SS 141.000 VND

16A/250V
2 pole socket size S



A8PCZ13/N-MS 169.000 VND

16A/250V
3 pole multi function socket size M

A8

Come from the German that has long civilization and forerunner science and technology



A8P-TVSS 129.000 VND

Impedance : 75Ω
 Insertion loss: VHF 3.5 dB UHF<5dB
 Flatness in Band ±1.0dB
 Tivi socket size S



A8P-TVMS 129.000 VND

Impedance : 75Ω
 Insertion loss: VHF 3.5 dB UHF<5dB
 Flatness in Band ±1.0dB
 Tivi socket size M



A8P-TELSS 159.000 VND

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIABI
 Telephone socket size S



A8P-TELEMS 159.000 VND

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIABI
 Telephone socket size M



A8P-PCSS 195.000 VND

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIABI
 Connector mode T56BA, T568B
 Computer socket size S



A8P-PCMS 195.000 VND

Temperature: -20°C~70°C
 Insulation resistance no less than 500MΩ
 Electrical specification EIA/TIABI
 Connector mode T56BA, T568B
 Computer socket size M



A8-D/G 215.000 VND

500W/220V~
 only for filament lamp
 Dimmer control



A8-D/S 215.000 VND

Working voltage : 220V~ 50Hz
 Load Power: 25-300W
 Load can be connected : Ceiling fan
 Speed control



A8USB 279.000 VND

Current : 2.1A
 USB socket



A8-LMD 15.000 VND

Fill in the blank piece size L



A8.1PM1

Single panel with
bracket size S
Plastic panel

35.000 VND



A8.1PM1.5

Middle panel with
bracket size M
Plastic panel

35.000 VND



A8.1PM2

Double panel with
bracket size 2S
Plastic panel

35.000 VND



A8.1PM3

Triple panel with
bracket size L
Plastic panel

35.000 VND



A8.1C20-1

Single panel with
bracket
Plastic panel

45.000 VND



A8.1C20-2

Double panel with
bracket
Plastic panel

45.000 VND



A8.1C21

C21 panel with bracket
Plastic panel

45.000 VND

UTEN

Noble and elegant, a symbol of nobles;
Fashionable and exquisite



Q120B

Series

Q120B

Come from the German that has long civilization and forerunner science and technology



Q120B-K11 20.000 VND

16A/250V
1 gang 1 way switch size S

Q120B-K12 31.000 VND

16A/250V
1 gang 2 way switch size S



Q120B-K21 43.000 VND

16A/250V
2 gang 1 way switch size M

Q120B-K22 62.000 VND

16A/250V
2 gang 2 way switch size M



Q120B-K11D 89.000 VND

10A/250V
1 gang 1 way switch with LED size S

Q120B-K12D 109.000 VND

10A/250V
1 gang 2 way switch with LED size S



Q120B-KMLD 95.000 VND

16A/250V
Door bell switch with LED size S



Q120B-KML 35.000 VND

16A/250V
Door bell switch size S



Q120B-KCL 105.000 VND

16A/250V
intermediate switch
Curtain switch size S



Q120B-K13 115.000 VND

Intermediate switch size S



Q120B-K20A 120.000 VND

20A switch size size S



Q120B-Z13/N 67.000 VND

16A/250V
3 pole multi function socket



Q120B-Z12 45.000 VND

16A/250V
2 pole socket size S



Q120B

Come from the German that has long civilization and forerunner science and technology



Q120B-USZ1

50.000 VND

15A/250V
Single US socket size S



Q120B-USZ2

110.000 VND

15A/250V
Double US socket size L



Q120B-D/S

118.000 VND

250W/220V
Speed control size S

Q120B-D/G

118.000 VND

300W/220V
Light dimmer



Q120B-2USB

225.000 VND

2.1A/5V
Double USB



Q120B-DH

215.000 VND

100W/220V
Motion sensor



Q120B-TV

58.000 VND

Impedance: 75Ω
Insertion loss: VHF 3.5dB UHF < 5dB
Flatness in Band ± 1.0dB
Tivi socket



Q120B-WTV

60.000 VND

Statellite socket



Q120B-TEL

58.000 VND

Insulation resistance: no less than 500MΩ
Electrical Specification: EIA/TIABI
Temperature: -20°C ~ 70°C
Humidity: 95%
Telephone socket



Q120B-PC

94.000 VND

Insulation resistance: no less than 500MΩ
Electrical Specification: EIA/TIABI
Connection mode: T568A, T568B
Computer socket



Q120B-DLR

62.000 VND

Red indicator light



Q120B-MD
Bland board size S

4.000 VND




Q120B-MLKY
10W/220V
Electronic door bell

130.000 VND



Q120B-K45A
45A/25V
45A switch

210.000 VND



Q120B-PM1
Single panel with
bracket size S

23.000 VND



Q120B-PM2
Double panel with
bracket size 2S

23.000 VND



Q120B-PM3

Triple panel with bracket size L

23.000 VND



Q120B-C20-1
Single panel with bracket

29.000 VND



Q120B-C21
C21 panel with bracket

29.000 VND

Q120B-C20-2
Double panel with bracket

29.000 VND



Q120D-PM3
Triple panel with bracket size L

70.000 VND



Q120B-PM6
Double Triple panel with bracket size L

75.000 VND

UTEN

Noble and elegant, a symbol of nobles;
Fashionable and exquisite



Q120

Series

Q120

Come from the German that has long civilization and forerunner science and technology



Q120-K11D 95.000 VND
10A/250V
1 gang 1 way switch with LED size S



Q120-K21 69.000 VND
16A/250V
2 gang 1 way switch size M

Q120-K22 79.000 VND
16A/250V
2 gang 2 way switch size M



Q120-K12D 115.000 VND
10A/250V
1 gang 2 way switch with LED size S



Q120-KMLD 103.000 VND
16A/250V
Door bell switch with LED size S



Q120-KML 78.000 VND
16A/250V
Door bell switch size S



Q120-KCL 188.000 VND
16A/250V
intermediate switch
Curtain switch size S



Q120-K13 188.000 VND
Intermediate switch size S



Q120-K20A 185.000 VND
20A switch size S



Q120-Z13/N 148.000 VND
16A/250V
3 pole multi function socket



Q120-Z12 123.000 VND
16A/250V
2 pole socket size S

Q120


Come from the German that has long civilization and forerunner science and technology



Q120-USZ1

135.000 VND

15A/250V
Single US socket size S



Q120-USZ2

235.000 VND

15A/250V
Double US socket size L



Q120-D/S

202.000 VND

250W/220V
Speed control size S



Q120-2USB

229.000 VND

2.1A/5V
Double USB

Q120-D/G

202.000 VND

300W/220V
Light dimmer



Q120-DH

345.000 VND

100W/220V
Motion sensor



Q120-TV

123.000 VND

Impedance: 75Ω
Insertion loss: VHF3.5dB UHF<5dB
Flatness in Band ±1.0dB
Tivi socket



Q120-WTV

145.000 VND

Statellite socket



Q120-TEL

151.000 VND

Insulation resistance: no less than 500MΩ
Electrical Specification: EIA/TIABI
Temperature: -20°C~70°C
Humidity: 95%
Telephone socket



Q120-PC

187.000 VND

Insulation resistance: no less than 500MΩ
Electrical Specification: EIA/TIABI
Connection mode: T568A, T568B
Computer socket



Q120-DLR

62.000 VND

Red inductor light size S




Q120-MD
Bland board size S

6.500 VND



Q120-MLKY
10W/220V
Electronic door bell

245.000 VND



Q120-K45A
45A/25V
45A switch

225.000 VND



Q120-C-PM3
Triple PC panel with
stand- copper

70.000 VND



Q120-C-PM3
Triple PC panel with
stand- gold

70.000 VND



Q120-D-PM3
Triple PC panel with
stand- copper

70.000 VND



Q120-D-PM3
Triple PC panel

70.000 VND



Q120D-C20-1
Single panel with bracket

80.000 VND



Q120D-C20-2
Double panel with bracket

80.000 VND



Q120D-C21
C21 panel with bracket

80.000 VND

Q120

Come from the German that has long oivilization and forerunner science and technology




Q120E-PM3 **235.000 VND**
Triple glass panel with stand- white



Q120E-PM3 **235.000 VND**
Triple glass panel with stand- gold



Q120E-PM3 **235.000 VND**
Triple glass panel with stand- Wine



Q120E-PM3 **235.000 VND**
Triple glass panel with stand- Clouds




Q120E-PM3 **235.000 VND**
Triple glass panel with stand- Brown



Q120E-PM3 **235.000 VND**
Triple glass panel with stand- Black



Q120E-C20-1 **245.000 VND**
Single glass panel with bracket



Q120E-C20-2 **245.000 VND**
Double glass panel with bracket



Q120E-C21 **245.000 VND**
C21 glass panel with bracket



FASHION

SWITCH & SOCKET

UTEN

Noble and elegant, a symbol of nobles;
Fashionable and exquisite



V4.0

Series

V4.0

Come from the German that has long civilization and forerunner science and technology



V4.0GK11 44.000 VND

1 Gang 1 Way Switch

V4.0GK12 51.000 VND

1 Gang 2 Way Switch

1. 16A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Toggle: 40,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



V4.0GK21 64.000 VND

2 Gang 1 Way Switch

V4.0GK22 77.000 VND

2 Gang 2 Way Switch

1. 16A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Toggle: 40,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



V4.0GK31 86.000 VND

3 Gang 1 Way Switch

V4.0GK32 104.000 VND

3 Gang 2 Way Switch

1. 16A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Toggle: 40,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



V4.0GK41 106.000 VND

4 Gang 1 Way Switch

V4.0GK42 129.000 VND

4 Gang 2 Way Switch

1. 16A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Toggle: 40,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



V4.0GK11Z13/N 93.000 VND

1 Gang 1 Way Switch
3 Pole Multi Function Socket

V4.0GK12Z13/N 100.000 VND

1 Gang 2 Way Switch
3 Pole Multi Function Socket

1. 16A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



V4.0G1GM 62.000 VND

Door Bell Switch

1. 16A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Toggle: 40,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



V4.0GK13 144.000 VND

1 Gang Multi Control Switch

1. 16A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Toggle: 40,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



V4.0GK23 204.000 VND

2 Gang Multi Control Switch

1. 16A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Toggle: 40,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



V5.0GK20A 245.000 VND

20A Switch

1. 20A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Toggle: 10,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



V5.0GK45A 295.000 VND

45A Switch

1. 45A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Toggle: 10,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm

V4.0

Come from the German that has long civilization and forerunner science and technology



V4.0GZ13/N 67.000 VND

3 Pole Multi Function Socket

- 1.16A/250VAC – 50/60HZ
2. Copper Class: Phosphor Bronze
3. Toggle: 10,000 times
4. Working Temperature: -20°C ~ 70°C,
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm



V4.0GZ12Z13/N 109.000 VND

5 Pole Multi Function Socket

- 1.16A/250VAC – 50/60Hz
2. Copper Class: Phosphor Bronze
3. Toggle: 10,000 times
4. Working Temperature: -20°C ~ 70°C
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm



V4.0G-2TV 131.000 VND

2 Tivi Socket

1. Impedance: 75 Ω
2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band ±1.0 dB
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm



V4.0G-1TV 89.000 VND

1 Tivi Socket

1. Impedance: 75 Ω
2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band ±1.0 dB
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm



V4.0G-2TEL 131.000 VND

2 Telephone Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: ≥ 500mΩ
3. Electrical Specification: ELA/TIABI
4. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm



V4.0G-1TEL 89.000 VND

1 Telephone Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: ≥ 500mΩ
3. Electrical Specification: ELA/TIABI
4. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm



V4.0G-2PC 189.000 VND

2 Computer Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: ≥ 500mΩ
3. Electrical Specification: ELA/TIABI
4. Connection Mode: T568A, T568B
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm



V4.0G-1PC 126.000 VND

1 Computer Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: ≥ 500mΩ
3. Electrical Specification: ELA/TIABI
4. Connection Mode: T568A, T568B
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm



V4.0-TVPC 168.000 VND

Tivi & Computer Socket

1. Impedance: 75 Ω
2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band ±1.0 dB
- COMPUTER:
1. Temperature: -20 ~ 70°C
2. Insertion Resistance: ≥ 500mΩ
3. Electrical Specification: ELA/TIABI
4. Connection Mode: T568A, T568B
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm



V4.0-TVTEL 131.000 VND

Tivi & Telephone Socket

1. Impedance: 75 Ω
2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band ±1.0 dB
- Telephone:
1. Temperature: -20 ~ 70°C
2. Insertion Resistance: ≥ 500mΩ
3. Electrical Specification: ELA/TIABI
4. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm


V4.0-TELPC 168.000 VND

Telephone & Computer Socket

1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: $\geq 500\text{m}\Omega$
 3. Electrical Specification: ELA/TIABI
 1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: $\geq 500\text{m}\Omega$
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size: 86mm x 86mm


V4.0GZ13/2NU 490.000 VND

USB Charging & Universal Socket

1. 2.1A/ 5V USB Charging
 2. 16A/ 250V Universal Socket
 3. Plastics: PC - Box: 10 set - Carton: 100 set
- Size: 86mm x 86mm


V4.0G-1D/S 208.000 VND

Speed Control Switch

1. Working Voltage: 220V ~ 50Hz
 2. Load Power: 25 ~ 300W
 3. Minimum Starting Voltage: 90~110V
 4. Load can be connected: Ceiling fan
 5. Never connect the zero line
 6. Plastics: PC - Box: 6 set - Carton: 60 set
- Size: 86mm x 86mm


V4.0G-1D/G 208.000 VND

Dimmer Control Switch

1. Working Voltage: 220V ~ 50Hz
 2. Maximum load power: 500W
 3. Minimum Starting Voltage: 13~35V
 4. Only for filament Lamp
 5. Plastics: PC - Box: 6 set - Carton: 60 set
- Size: 86mm x 86mm


V4.0G-1D/Y 253.000 VND

Sound Control Switch

1. Signal frequency range: 100Hz ~ 20KHz
 2. Rated load impedance: 8 Ω
 3. Rated input power: 5W
 4. Plastics: PC - Box: 6 set - Carton: 60 set
- Size: 86mm x 86mm


V5.0ZDC 890.000 VND

Shaver Charging Socket

1. 10A ~ 16A
 2. Load Power: 1100 ~ 2400W
 3. Working Voltage: 110V ~ 220V
 4. Plastics: PC - Box: 6 set - Carton: 60 set
- Size: 86mm x 86mm


V5.0G-1D/J 490.000 VND

Insert Card for Power On

V5.0G-1D/JG 880.000 VND

Insert Card for Power On
(High frequency)

1. Working Voltage: 30A/220V
 2. Only High-Frequency card insert into it can get power/Frequency: 13.56MHz
 3. Other Card is useless on it
 4. Plastics: PC - Box: 6 set - Carton: 60 set
- Size: 86mm x 86mm


V5.0G-3G/ML 413.000 VND

Don't Disturb & Please Clean
& Door bell Switch

1. Working Voltage: 220V ~ 50Hz
 2. No Less than 500 M Ω
 3. Maximum load power 5A
 4. Plastics: PC - Box: 8 set - Carton: 80 set
- Size: 86mm x 86mm


V4.0G-1D/H 402.000 VND

Human Body Sensor Switch

1. Working Voltage: 220V ~ 50Hz
 2. Load Power: Filament lamp 400W, fluorescent lamp, Electronic fluorescent lamp 200W
 3. Delay time: 30 ~ 40s
 4. Static Power: < 0.6W
 5. Light sensitive environment: Daybreak/Nightfall/Evening
 6. Range: Level angle 120°C
 7. Plastics: PC - Box: 8 set - Carton: 80 set
- Size: 86mm x 86mm


V4.0-MD 33.000 VND

Blank Panel

1. Blank Panel
 2. Plastics: PC - Box: 20 set - Carton: 200 set
- Size: 86mm x 86mm

V4.0

Come from the German that has long civilization and forerunner science and technology



V4.0G-1D/K 253.000 VND

Sound Control Delay Switch

1. Working Voltage: 220V ~ 50Hz
2. Load Power: Filamentlamp 400W, Fluorescent Lamps & LED Lamp 200W
3. Delay times: 60 ± 15s
4. Static Power: < 0.6W
5. Sensivity: 60 ~ 80db
6. Plastics: PC - Box: 8 set - Carton: 80 set
Size: 86mm × 86mm



V4.0G-1D/F 542.000 VND

Electronic Airflow Switch

1. Working Voltage: 220V ~ 50Hz
2. Mximum load power: 5A
3. Load Power: The motor
4. Electronic Airflow Switch
5. Plastics: PC - Box: 8 set - Carton: 80 set
Size: 86mm × 86mm



V4.0G-1D/C 333.000 VND

Touch Delay Switch

1. Working Voltage: 220V ~ 50Hz
2. Current: 5A
3. Delay time: 30 ± 10s
4. Static Current < 70ua(rms)
5. Load Power: Filamentlamp, Fluoresce Ntlamps, Electronic Fluorescentlamp
6. Plastics: PC - Box: 8 set - Carton: 80 set
Size: 86mm × 86mm



V4.0-GK21 78.000 VND

2 Gang 1 Way Switch (Gold Border)

V4.0-GK22 91.000 VND

2 Gang 2 Way Switch (Gold Border)

1. Working Voltage: 16A ~ 250V
2. Gold Border
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



V4M/1M 26.000 VND

Switch Panel (Gold Border)

V4M/2M 26.000 VND

Switch Panel (Gold Border)

1. Switch Panel
2. Gold Border
3. Plastics: PC - Box: 5 set - Carton: 500 set
Size: 86mm × 86mm



V4.0-GZ12Z13/N 123.000 VND

5 Pole Multi Function Socket (Gold Border)

1. Working Voltage: 16A ~ 250V
2. Gold Border
4. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



V4M/1M 26.000 VND

Switch Panel (Silver Border)

V4M/2M 26.000 VND

Switch Panel (Silver Border)

1. Switch Panel
2. Silver Border
3. Plastics: PC - Box: 5 set - Carton: 500 set
Size: 86mm × 86mm



V4.0G-2C/G 125.000 VND

Schuko Socket

1. 16A/250VAC -- 50/60Hz
2. Copper Class: Phosphor Bronze
3. Toggle: 10,000 times
4. Working Temperature: -20°C ~ 70°C
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



UB1F/C 90.000 VND

Waterproof Box

1. Waterproof
2. Plastics: PC - Box: 1 set - Carton: 200 set



UBBOX/A 24.000 VND

Cassee Box

1. Plastics: PC - Carton: 100 set
Size: 85mm × 85mm × 50mm

UTEN

Noble and elegant, a symbol of nobles;
Fashionable and exquisite



V6.0

Series

V6.0

Come from the German that has long civilization and forerunner science and technology



V6.0GK11 111.000 VND
1 Gang 1 Way Switch

V6.0GK12 119.000 VND
1 Gang 2 Way Switch

- 1. 16A/250VAC -- 50/60Hz
- 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
- 3. Switch Structure: Seesaw - Toggle: 40,000 times
- 4. Working Temperature: -20°C~ 70°C.
- 5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm



V6.0GK21 131.000 VND
2 Gang 1 Way Switch

V6.0GK22 144.000 VND
2 Gang 2 Way Switch

- 1. 16A/250VAC -- 50/60Hz
- 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
- 3. Switch Structure: Seesaw - Toggle: 40,000 times
- 4. Working Temperature: -20°C~ 70°C.
- 5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm



V6.0GK31 151.000 VND
3 Gang 1 Way Switch

V6.0GK32 169.000 VND
3 Gang 2 Way Switch

- 1. 16A/250VAC -- 50/60Hz
- 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
- 3. Switch Structure: Seesaw - Toggle: 40,000 times
- 4. Working Temperature: -20°C~ 70°C.
- 5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm



V6.0GK41 171.000 VND
4 Gang 1 Way Switch

V6.0GK42 195.000 VND
4 Gang 2 Way Switch

- 1. 16A/250VAC -- 50/60Hz
- 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
- 3. Switch Structure: Seesaw - Toggle: 40,000 times
- 4. Working Temperature: -20°C~ 70°C.
- 5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm



V6.0GK11Z13/N 149.000 VND
1 Gang 1 Way Switch
3 Pole Multi Function Socket

V6.0GK12Z13/N 155.000 VND
1 Gang 2 Way Switch
3 Pole Multi Function Socket

- 1. 16A/250VAC -- 50/60Hz
- 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
- 3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
- 4. Working Temperature: -20°C~ 70°C.
- 5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm



V6.0G1GM 126.000 VND
Door Bell Switch

- 1. 16A/250VAC -- 50/60Hz
- 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
- 3. Switch Structure: Seesaw - Toggle: 40,000 times
- 4. Working Temperature: -20°C~ 70°C.
- 5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm



V6.0GK13 189.000 VND
1 Gang Multi Control Switch

- 1. 16A/250VAC -- 50/60Hz
- 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
- 3. Switch Structure: Seesaw - Toggle: 10,000 times
- 4. Working Temperature: -20°C~ 70°C.
- 5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm



V6.0GK23 289.000 VND
2 Gang Multi Control Switch

- 1. 16A/250VAC -- 50/60Hz
- 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
- 3. Switch Structure: Seesaw - Toggle: 40,000 times
- 4. Working Temperature: -20°C~ 70°C.
- 5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm



V6.0GK20A 295.000 VND
20A Switch

- 1. 20A/250VAC -- 50/60Hz
- 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
- 3. Switch Structure: Seesaw - Toggle: 10,000 times
- 4. Working Temperature: -20°C~ 70°C.
- 5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm



V6.0GK45A 345.000 VND
45A Switch

- 1. 45A/250VAC -- 50/60Hz
- 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
- 3. Switch Structure: Seesaw - Toggle: 10,000 times
- 4. Working Temperature: -20°C~ 70°C.
- 5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm


V6.0GZ13/N 129.000^{VND}

3 Pole Multi Function Socket

- 1.16A/250VAC -- 50/60Hz
2. Copper Class: Phosphor Bronze
3. Toggle: 10,000 times
4. Working Temperature: -20°C ~ 70°C,
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm


V6.0GZ12Z13/N 144.000^{VND}

5 Pole Multi Function Socket

- 1.16A/250VAC -- 50/60Hz
2. Copper Class: Phosphor Bronze
3. Toggle: 10,000 times
4. Working Temperature: -20°C ~ 70°C
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm


V6.0G-1TV 153.000^{VND}

1 Tivi Socket

1. Impedance: 75 Ω
2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band ±1.0 dB
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm


V6.0G-2TV 186.000^{VND}

2 Tivi Socket

1. Impedance: 75 Ω
2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band ±1.0 dB
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm


V6.0G-1TEL 153.000^{VND}

1 Telephone Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: ≥ 500mΩ
3. Electrical Specification: ELA/TIABI
4. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm


V6.0G-2TEL 186.000^{VND}

2 Telephone Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: ≥ 500mΩ
3. Electrical Specification: ELA/TIABI
4. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm


V6.0G-1PC 204.000^{VND}

1 Computer Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: ≥ 500mΩ
3. Electrical Specification: ELA/TIABI
4. Connection Mode: T568A, T568B
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm


V6.0G-2PC 279.000^{VND}

2 Computer Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: ≥ 500mΩ
3. Electrical Specification: ELA/TIABI
4. Connection Mode: T568A, T568B
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm


V6.0-TVPC 242.000^{VND}

Tivi & Computer Socket

1. Impedance: 75 Ω
 2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band ±1.0 dB
- COMPUTER:
1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: ≥ 500mΩ
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm


V6.0-TVTEL 186.000^{VND}

Tivi & Telephone Socket

1. Impedance: 75 Ω
 2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band ±1.0 dB
- Telephone:
1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: ≥ 500mΩ
 3. Electrical Specification: ELA/TIABI
 4. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm

V6.0

Come from the German that has long civilization and forerunner science and technology



V6.0-TELPC **242.000 VND**

Telephone & Computer Socket

1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: ≥500mΩ
 3. Electrical Specification: ELA/TIABI
 1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: ≥ 500mΩ
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



V6.0G-1D/S **246.000 VND**

Speed Control Switch

1. Working Voltage: 220V ~ 50Hz
 2. Load Power: 25 ~ 300W
 3. Minimum Starting Voltage: 90~110V
 4. Load can be connected: Ceiling fan
 5. Never connect the zero line
 6. Plastics: PC - Box: 6 set - Carton: 60 set
- Size:86mm × 86mm



V6.0G-1D/G **246.000 VND**

Dimmer Control Switch

1. Working Voltage: 220V ~ 50Hz
 2. Maximum load power: 500W
 3. Minimum Starting Voltage: 13~35V
 4. Only for filament Lamp
 5. Plastics: PC - Box: 6 set - Carton: 60 set
- Size:86mm × 86mm



V6.0G-1D/Y **266.000 VND**

Sound Control Switch

1. Signal frequency range: 100Hz ~ 20KHz
 2. Rated load impedance: 8Ω
 3. Rated input power: 5W
 4. Plastics: PC - Box: 6 set - Carton: 60 set
- Size:86mm × 86mm



V6.0GZ13/2NU **540.000 VND**

USB Charging & Universal Socket

1. 2.1A/ 5V USB Charging
 2. 16A/ 250V Universal Socket
 3. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



V6.0ZDC **945.000 VND**

Shaver Charging Socket

1. 10A ~ 16A
 2. Load Power: 1100 ~ 2400W
 3. Working Voltage: 110V ~ 220V
 4. Plastics: PC - Box: 6 set - Carton: 60 set
- Size:86mm × 86mm



V6.0G-1D/J **590.000 VND**

Insert Card for Power On

1. Working Voltage: 30A/220V
2. Plastics: PC - Box: 6 set - Carton: 60 set



V6.0G-1D/F **622.000 VND**

Electronic airflow switch

1. Working Voltage: 220V ~ 50Hz
 2. Maximum Load Power: 25 ~ 300W
 3. Load can be connected: Ceiling fan
 4. Minimum Starting Voltage: 90 ~ 110V
 5. Electronic Airflow Switch
 6. Plastics: PC - Box: 8 set - Carton: 80 set
- Size:86mm × 86mm



V6.0G-MD **99.000 VND**

Blank Panel

1. Blank Panel
 2. Plastics: PC - Box: 20 set - Carton: 200 set
- Size:86mm × 86mm



V6.0G-UH **780.000 VND**

USB & HDMI

1. 2.1A/ 5V USB Charging
 2. Plastics: PC - Box: 8 set - Carton: 80 set
- Size:86mm × 86mm

**V6.0G-1D/C****348.000 VND**

Touch Delay Switch

1. Working Voltage: 220V ~ 50Hz
2. Current: 5A
3. Delay time: 30 ± 10s
4. Start Current ≤ 70UA(RMS)
5. Load Power: Filamentlamp, Fluoresce Ntlamps, Electronic Fluorescentlamp
6. Plastics: PC - Box: 8 set - Carton: 80 set
7. Size: 86mm × 86mm

**V6.0G-3G/ML****590.000 VND**

Don't Disturb & Please Clean & Door bell Switch

1. Working Voltage: 220V ~ 50Hz
2. No Less than 500 MΩ
3. Maximum load power 5A
4. Plastics: PC - Box: 8 set - Carton: 80 set
5. Size: 86mm × 86mm

**V6.0G-1D/H****399.000 VND**

Human Body Sensor Switch

1. Working Voltage: 220V ~ 50Hz
2. Load Power: Filamentlamp 400W, fluorescentlamp, Electronic fluorescentlamp 200W
3. Delay time: 30 ~ 40s
4. Static Power: < 0.6W
5. Light sensitive environment: Daybreak/Nightfall/Evening
6. Range: Level angle 120°C
7. Plastics: PC - Box: 8 set - Carton: 80 set
8. Size: 86mm × 86mm

**V6.0DPGK22****280.000 VND**

2 Gang Switch & with Please Clean & Do not disturb

1. Working Voltage: 16A/250V
2. 1 Gang Please Clean Switch
3. 1 Gang Do not disturb Switch
4. Plastics: PC - Box: 10 set - Carton: 100 set
5. Size: 86mm × 86mm

**V6.0-A/S****485.000 VND**

Step light

1. It is a light with sensor which you can install in the stair or corridor.
2. This light is influenced by the ambient light sense, and it will automatically sense the ambient light sense to decide whether to turn it on or not.
3. Plastics: PC - Box: 10 set - Carton: 100 set
4. Size: 86mm × 86mm

**V6.0G-1D/K****277.000 VND**

Sound Control Delay Switch

1. Working Voltage: 220V ~ 50Hz
2. Load Power: Filamentlamp 400W, Fluorescent Lamps & LED Lamp 200W
3. Delay times: 60 ± 15s
4. Start Current: < 0.6W
5. Sensitivity: 60 ~ 80db
6. Plastics: PC - Box: 8 set - Carton: 80 set
7. Size: 86mm × 86mm

**V6.0KZ12Z13/N****186.000 VND**

1 Gang & Universal Socket

1. 16A/250VAC -- 50/60Hz
2. Copper Class: Phosphor Bronze
3. Toggle: 10,000 times
4. Working Temperature: -20°C ~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
6. Size: 86mm × 86mm

**V6.0GZ/S****176.000 VND**

Schuko Socket

1. 16A/250VAC -- 50/60Hz
2. Copper Class: Phosphor Bronze
3. Toggle: 10,000 times
4. Working Temperature: -20°C ~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
6. Size: 86mm × 86mm

**S2Z13/N****1.230.000 VND**

Floor Socket & Pole Multi Function Socket

1. 16A/250V Floor Socket
2. 2x3 Pole multi Function Socket
3. Plastics: PC - Box: 1 set - Carton: 20 set

**SZ12/TEL/PC****1.230.000 VND**

2 Pole Socket & TEL Socket & PC Socket

1. 2 Pole Socket
2. TEL Socket
3. PC Socket
4. Plastics: PC - Box: 1 set - Carton: 20 set

V6.0

Come from the German that has long civilization and forerunner science and technology



V6.1-M/2M **243.000 VND**

Double Panel with bracket

Plastics: PC - Box: 6 set - Carton: 84 set
Size: 172mm x 86mm



V6.1-M/3M **425.000 VND**

Triple Panel with bracket

Plastics: PC - Box: 6 set - Carton: 84 set
Size: 258mm x 86mm



V6.1-M/4M **663.000 VND**

Quadruple Panel with bracket
Size: 344mm x 86mm



V6.1-M/5M **782.000 VND**

Quintuple Panel with bracket
Size: 430mm x 86mm



UTEN

Noble and elegant, a symbol of nobles;
Fashionable and exquisite



Q7

Series

Q7 Come from the German that has long civilization and forerunner science and technology



Q7GK12 203.000 VND

1 Gang 2 Way Switch LED

1. 10A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



Q7GK22 293.000 VND

2 Gang 2 Way Switch LED

1. 10A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



Q7GK32 380.000 VND

3 Gang 2 Way Switch LED

1. 10A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



Q7GK42 484.000 VND

4 Gang 2 Way Switch LED

1. 10A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



Q7GK12Z13/N 250.000 VND

1 Gang 2 Way Switch
3 Pole Multi Function Socket

1. 16A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



Q7-GM 145.000 VND

Door Bell Switch LED

1. 10A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



Q7GK13 245.000 VND

1 Gang Multi Control Switch LED

1. 10A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



Q7GK23 300.000 VND

2 Gang Multi Control Switch LED


1. 10A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



Q7GK20A 335.000 VND

20A Switch

1. 20A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Toggle: 10,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



Q7GK45A 399.000 VND

45A Switch

1. 45A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Toggle: 10,000 times
 4. Working Temperature: -20°C~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm


Q7GZ13/N **148.000 VND**
3 Pole Multi Function Socket

1. 16A/250VAC -- 50/60Hz
2. Copper Class: Phosphor Bronze
3. Toggle: 10,000 times
4. Working Temperature: -20°C ~ 70°C,
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm


Q7GZ12Z13/N **168.000 VND**
5 Pole Multi Function Socket

1. 16A/250VAC -- 50/60Hz
2. Copper Class: Phosphor Bronze
3. Toggle: 10,000 times
4. Working Temperature: -20°C ~ 70°C,
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm


Q7-MD **113.000 VND**
Blank Panel

1. Blank Panel
2. Plastics: PC - Box: 20 set - Carton: 200 set
Size: 86mm × 86mm


Q7GK11Z12Z13/N **269.000 VND**
**1 Gang 1 Way Switch Led
& 5 Pins Universal Socket**

1. 1 Gang 2 way Switch
2. 5 Pins Universal Socket
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm


Q7G-1TEL **175.000 VND**
1 Telephone Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: $\geq 500\text{m}\Omega$
3. Electrical Specification: ELA/TIABI
4. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm


Q7G-2TEL **214.000 VND**
2 Telephone Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: $\geq 500\text{m}\Omega$
3. Electrical Specification: ELA/TIABI
4. Connection Mode: T568A, T568B
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm


Q7G-1TV **175.000 VND**
1 Tivi Socket

1. Impedance: 75 Ω
2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band $\pm 1.0\text{ dB}$
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm


Q7G-2TV **214.000 VND**
2 Tivi Socket

1. Impedance: 75 Ω
2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band $\pm 1.0\text{ dB}$
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm


Q7G-1PC **234.000 VND**
1 Computer Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: $\geq 500\text{m}\Omega$
3. Electrical Specification: ELA/TIABI
4. Connection Mode: T568A, T568B
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm


Q7G-2PC **320.000 VND**
2 Computer Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: $\geq 500\text{m}\Omega$
3. Electrical Specification: ELA/TIABI
4. Connection Mode: T568A, T568B
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm

Q7

Come from the German that has long civilization and forerunner science and technology



Q7-TVPC 278.000 VND

Tivi & Computer Socket

TV:

1. Impedance: 75 Ω
2. Insertion Loss: VHF3.5dB
UHF < 5dB, Flatness in band ±1.0 dB
3. Plastics: PC - Box: 10 set - Carton: 100 set

COMPUTER:

1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: ≥ 500mΩ
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



Q7-TELPC 278.000 VND

Telephone & Computer Socket

Telephone:

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: ≥ 500mΩ
3. Electrical Specification: ELA/TIABI

Computer

1. Insertion Resistance: ≥ 500mΩ
 2. Electrical Specification: ELA/TIABI
 3. Connection Mode: T568A, T568B
 4. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



Q7-TVTEL 213.000 VND

TV & Telephone Socket

TV:

1. Impedance: 75 Ω
2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band ±1.0 dB
3. Plastics: PC - Box: 10 set - Carton: 100 set

Telephone:

1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: ≥ 500mΩ
 3. Electrical Specification: ELA/TIABI
 4. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



Q7G-1Y/C 176.000 VND

1 Gang Sound & 1 Way loud Speaker

1. Wire terminals composite structures, can meet the speaker different connection ways
 2. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



Q7G-1D/S 282.000 VND

Speed Control Switch

1. Signal frequency range: 100Hz ~ 20KHz
 2. Rated load impedance: 8Ω
 3. Rated input power: 5W
 4. Plastics: PC - Box: 6 set - Carton: 60 set
- Size:86mm × 86mm



Q7G-1D/G 282.000 VND

Dimmer Control Switch

1. Working Voltage: 220V ~ 50Hz
 2. Maximum load power: 500W
 3. Minimum Starting Voltage: 13~35V
 4. Only for filament Lamp
 5. Plastics: PC - Box: 6 set - Carton: 60 set
- Size:86mm × 86mm



Q7G-1D/Y 305.000 VND

Sound Control Switch

1. Signal frequency range: 100Hz ~ 20KHz
 2. Rated load impedance: 8Ω
 3. Rated input power: 5W
 4. Plastics: PC - Box: 6 set - Carton: 60 set
- Size:86mm × 86mm



Q7GZ13/2NU 560.000 VND

USB Charging & Universal Socket

1. 2.1A/ 5V USB Charging
 2. 16A/ 250V Universal Socket
 3. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



Q7G-1D/J 678.000 VND

Insert Card for Power On

1. Working Voltage: 30A/220V
2. Plastics: PC - Box: 6 set - Carton: 60 set

Q7G-1D/JG 995.000 VND

Insert Card for Power On
(High frequency)

1. Working Voltage: 30A/220V
 2. Only High-Frequency card insert into it can get power/Frequency: 13.56MHz
 3. Other Card is useless on it
 4. Plastics: PC - Box: 6 set - Carton: 60 set
- Size:86mm × 86mm



Q7G-3G/ML 678.000 VND

Don't Disturb & Please Clean & Door bell Switch

1. Working Voltage: 220V ~ 50Hz
 2. No Less than 500 MΩ
 3. Maximum load power 5A
 4. Plastics: PC - Box: 8 set - Carton: 80 set
- Size:86mm × 86mm



Q7DPGK22 **380.000** VND

2 Gang Switch & with Please Clean & Do not disturb

1. Working Voltage: 16A/250V
2. 1 Gang Please Clean Switch
3. 1 Gang Do not disturb Switch
4. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm x 86mm



Q7G-1D/H **458.000** VND

Human Body Sensor Switch

1. Working Voltage: 220V ~ 50Hz
2. Load Power: Filament lamp 400W, fluorescent lamp, Electronic fluorescent lamp 200W
3. Delay time: 30 ~ 40s
4. Static Power: < 0.6W
5. Light sensitive environment: Daybreak/Nightfall/Evening
6. Range: Level angle 120°C
7. Plastics: PC - Box: 8 set - Carton: 80 set
Size: 86mm x 86mm



Q7ZDC **1.086.000** VND

Shaver Charging Socket

1. 10A ~ 16A
2. Load Power: 1100 ~ 2400W
3. Working Voltage: 110V ~ 220V
4. Plastics: PC - Box: 6 set - Carton: 60 set
Size: 86mm x 86mm



Q7G-1D/C **400.000** VND

Touch Delay Switch

1. Working Voltage: 220V ~ 50Hz
2. Current: 5A
3. Delay time: 30 ± 10s
4. Static Current ≤ 70UA(RMS)
5. Load Power: Filament lamp, Fluorescent lamp, Electronic Fluorescent lamp
6. Plastics: PC - Box: 8 set - Carton: 80 set
Size: 86mm x 86mm



Q7G-1D/F **715.000** VND

Electronic Airflow Switch

1. Working Voltage: 220V ~ 50Hz
2. Maximum load power: 5A
3. Load Power: The motor
4. Electronic Airflow Switch
5. Plastics: PC - Box: 8 set - Carton: 80 set
Size: 86mm x 86mm



Q7G-1D/K **318.000** VND

Sound Control Delay Switch

1. Working Voltage: 220V ~ 50Hz
2. Load Power: Filament lamp 400W, Fluorescent Lamps & LED Lamp 200W
3. Delay times: 60 ± 15s
4. Static Power: < 0.6W
5. Sensitivity: 60 ~ 80db
6. Plastics: PC - Box: 8 set - Carton: 80 set
Size: 86mm x 86mm



UB1F/C **90.000** VND

Waterproof Box

1. Waterproof
2. Plastics: PC - Box: 1 set - Carton: 200 set



UBBOX/A **24.000** VND

Cassee Box

1. Plastics: PC - Carton: 100 set
Size: 85mm x 85mm x 50mm

UTEN

Noble and elegant, a symbol of nobles;
Fashionable and exquisite



Q9

Series

Q9 Come from the German that has long civilization and forerunner science and technology



Q9GK12 215.000 VND

1 Gang 2 Way Switch

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm



Q9GK22 306.000 VND

2 Gang 2 Way Switch

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm



Q9GK32 396.000 VND

3 Gang 2 Way Switch

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm



Q9GK42 490.000 VND

4 Gang 2 Way Switch

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm



Q9GKZ12Z13/N 328.000 VND

5 Pole Multi Function Socket With Switch

1. 16A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm



Q9G1GM 223.000 VND

Door Bell Switch

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm



Q9GK13 306.000 VND

1 Gang Multi Control Switch

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm



Q9GK23 415.000 VND

2 Gang Multi Control Switch

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm



Q9GK20A 355.000 VND

20A Switch

1. 20A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 10,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm



Q9GK45A 415.000 VND

45A Switch

1. 45A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 10,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm × 86mm

Q9 Come from the German that has long civilization and forerunner science and technology



Q9-MD 194.000 VND

Blank Panel

1. Blank Panel
2. Plastics: PC - Box: 20 set - Carton: 200 set
Size:86mm x 86mm



Q9GZ12Z13/N 274.000 VND

S Pole Multi Function Socket

- 1.16A/250VAC -- 50/60Hz
2. Copper Class: Phosphor Bronze
3. Toggle: 10,000 times
4. Working Temperature: -20°C ~ 70°C,
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm



Q9G-1TEL 274.000 VND

1 Telephone Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: $\geq 500m\Omega$
3. Electrical Specification: ELA/TIABI
4. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm



Q9G-2TEL 356.000 VND

2 Telephone Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: $\geq 500m\Omega$
3. Electrical Specification: ELA/TIABI
4. Connection Mode: T568A, T568B
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm



Q9G-1TV 274.000 VND

1 Tivi Socket

1. Impedance: 75 Ω
2. Insertion Loss: VHF<3.5dB
UHF < 5dB, Flatness in band ± 1.0 dB
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm



Q9G-2TV 356.000 VND

2 Tivi Socket

1. Impedance: 75 Ω
2. Insertion Loss: VHF<3.5dB
UHF < 5dB, Flatness in band ± 1.0 dB
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm



Q9G-1PC 338.000 VND

1 Computer Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: $\geq 500m\Omega$
3. Electrical Specification: ELA/TIABI
4. Connection Mode: T568A, T568B
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm



Q9G-2PC 468.000 VND

2 Computer Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: $\geq 500m\Omega$
3. Electrical Specification: ELA/TIABI
4. Connection Mode: T568A, T568B
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm



Q9-TVPC 385.000 VND

1TIVI & Computer Socket

- TV:
1. Impedance: 75 Ω
 2. Insertion Loss: VHF3.5dB
UHF < 5dB, Flatness in band ± 1.0 dB
 3. Plastics: PC - Box: 10 set - Carton: 100 set
- COMPUTER:
1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: $\geq 500m\Omega$
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm



Q9-TELPC 385.000 VND

Telephone & Computer Socket

- Telephone:
1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: $\geq 500m\Omega$
 3. Electrical Specification: ELA/TIABI
1. Temperature: -20 ~ 70°C
2. Insertion Resistance: $\geq 500m\Omega$
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm


Q9-TVTEL 338.000 VND

Tivi & Telephone Socket

TV :

1. Impedance: 75 Ω
2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band ±1.0 dB
3. Plastics: PC - Box: 10 set - Carton: 100 set

Telephone:

1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: ≥ 500mΩ
 3. Electrical Specification: ELA/TIABI
 4. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm


Q9G-1Y/C 317.000 VND

1 Gang Sound & 1 Way loud Speaker

1. Wire terminals composite structures, can meet the speaker different connection ways
 2. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm


Q9GZ13/2NU 806.000 VND

USB Charging & Universal Socket

1. 2.1A/ 5V USB Charging
 2. 16A/ 250V Universal Socket
 3. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm


Q9G-1D/S 438.000 VND

Speed Control Switch

1. Working Voltage: 220V ~ 50Hz
 2. Load Power: 25 ~ 300W
 3. Minimum Starting Voltage: 90~110V
 4. Load can be connected: Ceiling fan
 5. Never connect the zero line
 6. Plastics: PC - Box: 6 set - Carton: 60 set
- Size:86mm × 86mm


Q9G-1D/G 438.000 VND

Dimmer Control Switch

1. Working Voltage: 220V ~ 50Hz
 2. Maximum load power: 500W
 3. Minimum Starting Voltage: 13~35V
 4. Only for filament Lamp
 5. Plastics: PC - Box: 6 set - Carton: 60 set
- Size:86mm × 86mm


Q9G-1D/Y 486.000 VND

Door bell switch Size M

1. Signal frequency range: 100Hz ~ 20KHz
 2. Rated load impedance: 8Ω
 3. Rated input power: 5W
 4. Plastics: PC - Box: 6 set - Carton: 60 set
- Size:86mm × 86mm


Q9GZDC 1.428.000 VND

Shaver Charging Socket

1. 10A ~ 16A
 2. Load Power: 1100 ~ 2400W
 3. Working Voltage: 110V ~ 220V
 4. Plastics: PC - Box: 6 set - Carton: 60 set
- Size:86mm × 86mm


Q9G-3G/ML 840.000 VND

Don't Disturb & Please Clean & Door bell Switch

1. Working Voltage: 220V ~ 50Hz
 2. No Less than 500 MΩ
 3. Maximum load power 5A
 4. Plastics: PC - Box: 8 set - Carton: 80 set
- Size:86mm × 86mm


Q9G-1D/J 1.366.000 VND

Insert Card for Power On

1. Working Voltage: 30A/220V
 2. Plastics: PC - Box: 6 set - Carton: 60 set
- Size:86mm × 86mm


Q9G-1D/JG 1.666.000 VND

Insert Card for Power On (High frequency)

1. Working Voltage: 30A/220V
 2. Only High-Frequency card insert into it can get power/Frequency: 13.56MHz
 3. Other Card is useless on it
 4. Plastics: PC - Box: 6 set - Carton: 60 set
- Size:86mm × 86mm

Q9 Come from the German that has long civilization and forerunner science and technology



Q9G-1D/C 734.000 VND

Touch Delay Switch

1. Working Voltage: 220V ~ 50Hz
 2. Current: 5A
 3. Delay time: 30 ± 10s
 4. Staric Current ≤ 70UA(RMS)
 5. Load Power: Filamentlamp, Fluoresce Ntlamps, Electronic Fluorescentlamp
 6. Plastics: PC - Box: 8 set - Carton: 80 set
- Size:86mm × 86mm



Q9G-1D/H 890.000 VND

Human Body Sensor Switch

1. Working Voltage: 220V ~ 50Hz
 2. Load Power: Filamentlamp 400W, fluorescentlamp, Electronic fluorescentlamp 200W
 3. Delay time: 30 ~ 40s
 4. Static Power: < 0.6W
 5. Light sensitive environment: Daybreak/Nightfall/Evening
 6. Range: Label angel 120°C
 7. Plastics: PC - Box: 8 set - Carton: 80 set
- Size:86mm × 86mm



Q9G-1D/K 510.000 VND

Sound Control Delay Switch

1. Working Voltage: 220V ~ 50Hz
 2. Load Power: Flamentlamp 400W, Fluorescent Lamps & LED Lamp 200W
 3. Delay times: 60 ± 15s
 4. Staric Power: < 0.6W
 5. Sensifvity: 60 ~ 80db
 6. Plastics: PC - Box: 8 set - Carton: 80 set
- Size:86mm × 86mm



Q9A/S 695.000 VND

Step light

1. It is a light with sensor which you can install in the stair or corridor.
 2. This light is influenced by the ambient light sense, and it will automatically sence the ambient light sense to decide whether to turn it on or not.
 3. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



V6G-W/F 1.365.000 VND

Multifunctional Wall WiFi Router

1. Working Voltage: 110 ~ 240V
 2. Staring Voltage: 5V 1500mA from USB Socket
 3. USB Socket can connect with UDisk, Mobile hard disk.
 4. WPS and WiFi design makes it easy to encrypt data and turn WiFi signals on and off.
 5. Effectively reduce signal blind area, extend WiFi distance and save a lot of network wiring.
 6. Charge LANO Power, it makes Network connection is optional.
 7. Support 3G SIM card.
- Size:86mm × 86mm



Q9G-F/L 551.000 VND

SOS Emnergency Switch


- Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



Q9G-M/2M 89.000 VND

Double Panel with bracket

- Plastics: PC - Box: 6 set - Carton: 84 set
- Size:147mm × 90mm



Q9-M/3M 129.000 VND

Triple Panel with bracket

- Plastics: PC - Box: 6 set - Carton: 84 set
- Size:260mm × 90mm



Q9-M/4M 169.000 VND

Quadruple Panel with bracket

- Size:346mm × 90mm



Q9-M/5M 219.000 VND

Quintuple Panel with bracket

- Size:432mm × 90mm

UTEN

Noble and elegant,a symbol of nobles;
Fashionable and exquisite



A5 Series

A5

Come from the German that has long civilization and forerunner science and technology



A5GK11 169.000 VND

1 Gang 1 Way Switch

A5GK12 180.000 VND

1 Gang 2 Way Switch

1. 16A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Toggle: 40,000 times
 4. Working Temperature: -20°C ~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



A5GK21 196.000 VND

2 Gang 1 Way Switch

A5GK22 211.000 VND

2 Gang 2 Way Switch

1. 16A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Toggle: 40,000 times
 4. Working Temperature: -20°C ~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



A5GK31 221.000 VND

3 Gang 1 Way Switch

A5GK32 245.000 VND

3 Gang 2 Way Switch

1. 16A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Toggle: 40,000 times
 4. Working Temperature: -20°C ~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



A5GK41 248.000 VND

4 Gang 1 Way Switch

A5GK42 279.000 VND

4 Gang 2 Way Switch

1. 16A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Toggle: 40,000 times
 4. Working Temperature: -20°C ~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



A5G-1GM 190.000 VND

Door Bell Switch

1. 16A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Toggle: 40,000 times
 4. Working Temperature: -20°C ~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



A5GK13 238.000 VND

1 Gang Multi Control Switch

1. 16A/250VAC -- 50/60Hz
 2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
 3. Switch Structure: Seesaw - Toggle: 40,000 times
 4. Working Temperature: -20°C ~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



A5-MD 155.000 VND

Blank Panel

1. Blank Panel
 2. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



A5GZ13/N 190.000 VND

3 Pole Multi Function Socket

1. 16A/250VAC -- 50/60Hz
 2. Copper Class: Phosphor Bronze
 3. Toggle: 10,000 times
 4. Working Temperature: -20°C ~ 70°C.
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



A5GZ13/2NU 620.000 VND

USB Charging & Universal Socket

1. 2.1A/ 5V USB Charging
2. 16A/ 250V Universal Socket
3. Plastics: PC - Box: 10 set - Carton: 100 set



A5GZ12Z13/N 199.000 VND

5 Pole Multi Function Socket

1. 16A/250VAC -- 50/60Hz
2. Copper Class: Phosphor Bronze
3. Toggle: 10,000 times
4. Working Temperature: -20°C ~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set

**A5G-1D/S****338.000**^{VND}

Speed Control Switch

1. Working Voltage: 220V ~ 50Hz
2. Load Power: 25 ~ 300W
3. Minimum Starting Voltage: 90~110V
4. Load can be connected: Ceiling fan
5. Never connect the zero line
6. Plastics: PC - Box: 6 set - Carton: 60 set
Size:86mm x 86mm

**A5G-1D/G****338.000**^{VND}

Dimmer Control Switch

1. Working Voltage: 220V ~ 50Hz
2. Maximum load power: 500W
3. Minimum Starting Voltage: 13~35V
4. Only for filament Lamp
5. Plastics: PC - Box: 6 set - Carton: 60 set
Size:86mm x 86mm

**A5GK11Z13/N****218.000**^{VND}1 Gang 1 Way Switch
3 Pole Multi Function Socket**A5GK12Z13/N****228.000**^{VND}1 Gang 2 Way Switch
3 Pole Multi Function Socket

1. 16A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
4. Working Temperature: -20°C ~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm

**A5G-1TEL****223.000**^{VND}

1 Telephone Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: $\geq 500\text{m}\Omega$
3. Electrical Specification: ELA/TIABI
4. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm

**A5G-2TEL****263.000**^{VND}

2 Telephone Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: $\geq 500\text{m}\Omega$
3. Electrical Specification: ELA/TIABI
4. Connection Mode: T568A, T568B
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm

**A5G-1TV****223.000**^{VND}

1 Tivi Socket

1. Impedance: 75 Ω
2. Insertion Loss: VHF<3.5dB
UHF < 5dB, Flatness in band $\pm 1.0\text{dB}$
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm

**A5G-2TV****263.000**^{VND}

2 Tivi Socket

1. Impedance: 75 Ω
2. Insertion Loss: VHF<3.5dB
UHF < 5dB, Flatness in band $\pm 1.0\text{dB}$
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm

**A5G-1PC****287.000**^{VND}

1 Computer Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: $\geq 500\text{m}\Omega$
3. Electrical Specification: ELA/TIABI
4. Connection Mode: T568A, T568B
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm

**A5G-2PC****373.000**^{VND}

2 Computer Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: $\geq 500\text{m}\Omega$
3. Electrical Specification: ELA/TIABI
4. Connection Mode: T568A, T568B
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size:86mm x 86mm

A5

Come from the German that has long civilization and forerunner science and technology



A5G-TVPC

333.000 VND

Tivi & Computer Socket

TV :

1. Impedance: 75 Ω
2. Insertion Loss: VHF3.5dB
UHF < 5dB, Flatness in band ±1.0 dB
3. Plastics: PC - Box: 10 set - Carton: 100 set

COMPUTER:

1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: ≥ 500mΩ
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



A5G-TELPC

333.000 VND

Telephone & Computer Socket

Telephone:

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: ≥ 500mΩ
3. Electrical Specification: ELA/TIABI

COMPUTER:

1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: ≥ 500mΩ
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



A5G-TVTEL

263.000 VND

Tivi & Telephone Socket

TV :

1. Impedance: 75 Ω
2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band ±1.0 dB
3. Plastics: PC - Box: 10 set - Carton: 100 set

Telephone:

1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: ≥ 500mΩ
 3. Electrical Specification: ELA/TIABI
 4. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



A5G-1D/J

796.000 VND

Insert Card for Power On

1. Working Voltage: 30A/220V
 2. Plastics: PC - Box: 6 set - Carton: 60 set
- Size:86mm × 86mm



A5DPGK22

295.000 VND

2 Gang Switch
& with Please Clean
& Do not disturb

1. Working Voltage: 16A/250V
 2. 1 Gang Please Clean Switch
 3. 1 Gang Do not disturb Switch
 4. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



A5G-3G/ML

578.000 VND

Don't Disturb & Please Clean
& Door bell Switch

1. Working Voltage: 220V ~ 50Hz
 2. No Less than 500 M
 3. Maximum load power 5A
 4. Plastics: PC - Box: 8 set - Carton: 80 set
- Size:86mm × 86mm



A5G-1D/H

528.000 VND

Human Body Sensor Switch

1. Working Voltage: 220V ~ 50Hz
 2. Load Power: Filament lamp 400W, fluorescent lamp,
Electronic fluorescent lamp 200W
 3. Delay time: 30 ~ 40s
 4. Static Power: < 0.6W
 5. Light sensitive environment: Daybreak/Nightfall/Evening
 6. Range: Label angle 120°C
 7. Plastics: PC - Box: 8 set - Carton: 80 set
- Size:86mm × 86mm



A5ZDC

1.140.000 VND

Shaver Charging Socket

1. 10A ~ 16A
 2. Load Power: 1100 ~ 2400W
 3. Working Voltage: 110V ~ 220V
 4. Plastics: PC - Box: 6 set - Carton: 60 set
- Size:86mm × 86mm



A5G-1D/C

502.000 VND

Touch Delay Switch

1. Working Voltage: 220V ~ 50Hz
 2. Current: 5A
 3. Delay time: 30 ± 10s
 4. Static Current ≤ 70UA(RMS)
 5. Load Power: Filament lamp, Fluoresce Ntlamps,
Electronic Fluorescent lamp
 6. Plastics: PC - Box: 8 set - Carton: 80 set
- Size:86mm × 86mm



A5A/S

535.000 VND

Step light

1. It is a light with sensor which you can install in the stair or corridor.
 2. This light is influenced by the ambient light sense, and it will automatically sense the ambient light sense to decide whether to turn it on or not.
 3. Plastics: PC - Box: 10 set - Carton: 100 set
- Size:86mm × 86mm



S-2Z13/N **1.230.000 VND**
 Floor Socket
 & Pole Multi Function Socket
 1. 16A/250V Floor Socket
 2. 2x3 Pole multi Function Socket
 3. Plastics: PC - Box: 1 set - Carton: 20 set



S-2Z13/N **1.230.000 VND**
 Floor Socket
 & Pole Multi Function Socket
 1. 16A/250V Table Socket
 2. 2x3 Pole multi Function Socket
 3. Plastics: PC - Box: 1 set - Carton: 20 set



SZ12/TEL/PC **1.230.000 VND**
 Floor Socket
 & Pole Multi Function Socket
 1. 16A/250V Floor Socket
 2. 2x3 Pole multi Function Socket
 3. Plastics: PC - Box: 1 set - Carton: 20 set



S-Z12/TEL/PC **1.230.000 VND**
 Floor Socket
 2 Pole Socket
 & TEL Socket & PC Socket
 1. 2 Pole Socket
 2. TEL Socket
 3. PC Socket
 4. Plastics: PC - Box: 1 set - Carton: 20 set



S-TEL/PC **1.230.000 VND**
 Floor Socket
 & TEL Socket
 & PC Socket
 1. TEL Socket
 2. PC Socket
 3. Plastics: PC - Box: 1 set - Carton: 20 set



S-Z13/PC **1.230.000 VND**
 Floor Socket
 & Pole Multi Function Socket
 & PC Socket
 1. 16A/250V Floor Socket
 2. Pole multi Function Socket
 3. PC Socket
 4. Plastics: PC - Box: 1 set - Carton: 20 set



S-Z12TVPC **1.230.000 VND**
 Floor Socket
 & Pole Multi Function Socket
 1. 16A/250V Table Socket
 2. 2x3 Pole multi Function Socket
 3. Plastics: PC - Box: 1 set - Carton: 20 set



S-Z12TVPC **1.230.000 VND**
 Floor Socket
 & Pole Multi Function Socket
 1. 16A/250V Table Socket
 2. 2x3 Pole multi Function Socket
 3. Plastics: PC - Box: 1 set - Carton: 20 set



UB1F/C **90.000 VND**
 Waterproof Box
 1. Waterproof
 2. Plastics: PC - Box: 1 set - carton: 200 set



UBBOX/A **24.000 VND**
 Cassee Box
 1. Plastics: PC - Carton: 100 set
 Size: 85mm x 85mm x 50mm

UTEN

Noble and elegant,a symbol of nobles;
Fashionable and exquisite



S300

Series



S300 Come from the German that has long civilization and forerunner science and technology



S300GK11 122.000 VND

1 Gang 1 Way Switch



S300GK12 131.000 VND

1 Gang 2 Way Switch

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 40,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm x 86mm



S300GK21 145.000 VND

2 Gang 1 Way Switch



S300GK22 160.000 VND

2 Gang 2 Way Switch

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 40,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm x 86mm



S300GK31 165.000 VND

3 Gang 1 Way Switch



S300GK32 188.000 VND

3 Gang 2 Way Switch

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 40,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm x 86mm



S300GK41 188.000 VND

4 Gang 1 Way Switch



S300GK42 217.000 VND

4 Gang 2 Way Switch

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 40,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm x 86mm



S300K11Z12Z13 212.000 VND

1 Gang 1 Way Switch
5 Pole Multi Function Socket



1. 16A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm x 86mm



S300G-1G/M 138.000 VND

Door Bell Switch



1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm x 86mm



S300GK13 216.000 VND

1 Gang Multi Control Switch



1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 40,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm x 86mm



S300GK23 336.000 VND

2 Gang Multi Control Switch



1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 40,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm x 86mm



S300GZ13/2NU 615.000 VND

USB Charging & Universal Socket



1. 2.1A/ 5V USB Charging
2. 16A/ 250V Universal Socket
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm x 86mm



S300GZ12Z13/N 164.000 VND

5 Pole Multi Function Socket



1. 16A/250VAC -- 50/60Hz
2. Copper Class: Phosphor Bronze
3. Toggle: 10,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm x 86mm

S300

Come from the German that has long civilization and forerunner science and technology



S300G-1TEL 167.000 VND

1 Telephone Socket

1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: $\geq 500\text{m}\Omega$
 3. Electrical Specification: ELA/TIABI
 4. Plastics: PC - Box: 10 set - Carton: 100 set
- Size: 86mm \times 86mm



S300G-2TEL 203.000 VND

2 Telephone Socket

1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: $\geq 500\text{m}\Omega$
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size: 86mm \times 86mm



S300G-1TV 167.000 VND

1 Tivi Socket

1. Impedance: 75 Ω
 2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band ± 1.0 dB
 3. Plastics: PC - Box: 10 set - Carton: 100 set
- Size: 86mm \times 86mm



S300G-2TV 203.000 VND

2 Tivi Socket

1. Impedance: 75 Ω
 2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band ± 1.0 dB
 3. Plastics: PC - Box: 10 set - Carton: 100 set
- Size: 86mm \times 86mm



S300G-1PC 225.000 VND

1 Computer Socket

1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: $\geq 500\text{m}\Omega$
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size: 86mm \times 86mm



S300G-2PC 305.000 VND

2 Computer Socket

1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: $\geq 500\text{m}\Omega$
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size: 86mm \times 86mm



S300-TVTEL 203.000 VND

Tivi & Telephone

1. Impedance: 75 Ω
 2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band ± 1.0 dB
 1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: $\geq 500\text{m}\Omega$
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size: 86mm \times 86mm



S300-TVPC 264.000 VND

Tivi & Computer Socket

- TV :
1. Impedance: 75 Ω
 2. Insertion Loss: VHF3.5dB
UHF < 5dB, Flatness in band ± 1.0 dB
 3. Plastics: PC - Box: 10 set - Carton: 100 set
1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: $\geq 500\text{m}\Omega$
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size: 86mm \times 86mm



S300-TELPC 264.000 VND

Telephone & Computer Socket

- Telephone:
1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: $\geq 500\text{m}\Omega$
 3. Electrical Specification: ELA/TIABI
1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: $\geq 500\text{m}\Omega$
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size: 86mm \times 86mm



S300-M/D 108.000 VND

Blank Panel

1. Blank Panel
 2. Plastics: PC - Box: 20 set - Carton: 200 set
- Size: 86mm \times 86mm



**S300GK20A****327.000 VND**

20A Switch

1. 20A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 10,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size: 86mm × 86mm

**S300GK45A****397.000 VND**

45A Switch

1. 45A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 10,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size: 86mm × 86mm

**S300G-1D/S****288.000 VND**

Speed Control Switch

1. Working Voltage: 220V~ 50Hz
2. Load Power: 25 ~ 300W
3. Minimum Staring Voltage: 90~110V
4. Load can be connected: Ceiling fan
5. Never connect the zero line
6. Plastics: PC - Box: 6 set - Carton: 60 set
- Size: 86mm × 86mm

**S300G-1D/G****288.000 VND**

Dimmer Control Switch

1. Working Voltage: 220V ~ 50Hz
2. Maximum load power: 500W
3. Minimum Staring Voltage: 13~ 35V
4. Only for filament Lamp
5. Plastics: PC - Box: 6 set - Carton: 60 set
- Size: 86mm × 86mm

**S300ZDC****1.128.000 VND**

Shaver Charging Socket

1. 10A ~ 16A
2. Load Power: 1100 ~ 2400W
3. Working Voltage: 110V ~ 220V
4. Plastics: PC - Box: 6 set - Carton: 60 set
- Size: 86mm × 86mm

**S300G-1D/H****468.000 VND**

Human Body Sensor Switch

1. Working Voltage: 220V ~ 50Hz
2. Load Power: Filament lamp 400W, fluorescent lamp, Electronic fluorescent lamp 200W
3. Delay time: 30 ~ 40s
4. Static Power: < 0.6W
5. Light sensitive environment: Daybreak/Nightfall/Evening
6. Range: Label angle 120°C
7. Plastics: PC - Box: 8 set - Carton: 80 set
- Size: 86mm × 86mm

**S300G-1D/J****695.000 VND**

Insert Card for Power On

1. Working Voltage: 30A/220V
2. Plastics: PC - Box: 6 set - Carton: 60 set
- Size: 86mm × 86mm

**S300G-1D/JG****999.000 VND**

Insert Card for Power On(High frequency)

1. Working Voltage: 30A/220V
2. Only high-frequency card insert into it can get power/frequency:13.56 MHz
3. other card is useless on it
6. Plastics: PC - Box: 6set - Carton: 60 set
- Size: 86mm × 86mm

**S300G-3G/ML****685.000 VND**

Don't Disturb & Please Clean & Door bell Switch

1. Working Voltage: 220V ~ 50Hz
2. No less than 500 MΩ
3. Maximum load power 5A
4. Plastics: PC - Box: 8 set - Carton: 80 set
- Size: 86mm × 86mm

**S300DPGK22****330.000 VND**Don't Disturb & Please Clean Switch
(For S300G-3G/ML)

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 40,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size: 86mm × 86mm



S300

Come from the German that has long civilization and forerunner science and technology



S300-A/S

Step light

1. It is a light with sensor which you can install in the stair or corridor.
2. This light is influenced by the ambient light sense, and it will automatically sense the ambient light sense to decide whether to turn it on or not.
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S300GZ/S

Schuko Socket

1. 16A/250VAC--50/60Hz
2. Copper Class: Phosphor Bronze
3. Toggle: 10,000 times
4. Working Temperature: -20°C ~ 70°C,
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S300G-1STV

StateliteTV Socket

1. Impedance: 75 Ω
2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band ±1.0 dB
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S300G-2USB3.1

Double USB Charging

1. 2.1A/ 5V USB Charging
2. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S300-F/L

SOS Emergency Socket

- Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S300G-1D/K

Sound Control Delay Switch

1. Working Voltage: 220V ~ 50Hz
2. Load Power: Flamentlamp 400W, Fluorescent Lamps & LED Lamp 200W
3. Delay times: 60 ± 15s
4. Staric Power: < 0.6W
5. Sensifivity: 60 ~ 80db
6. Plastics: PC - Box: 8 set - Carton: 80 set
Size: 86mm × 86mm



S300-KZ13/N

5 Pole Multi Function Socket

1. 16A/250VAC--50/60Hz
2. Copper Class: Phosphor Bronze
3. Toggle: 10,000 times
4. Working Temperature: -20°C ~ 70°C,
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



216.000 VND



S300-2KZ13/N

5 Pole Multi Function Socket

1. 16A/250VAC--50/60Hz
2. Copper Class: Phosphor Bronze
3. Toggle: 10,000 times
4. Working Temperature: -20°C ~ 70°C,
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



420.000 VND

UTEN

Noble and elegant,a symbol of nobles;
Fashionable and exquisite



S400

Series

S400

Come from the German that has long civilization and forerunner science and technology



S400GK12 131.000 VND

1 Gang 2 Way Switch

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 40,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S400GK22 160.000 VND

2 Gang 2 Way Switch

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 40,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S400GK32 188.000 VND

3 Gang 2 Way Switch

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 40,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S400GK42 217.000 VND

4 Gang 2 Way Switch

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 40,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S400K11Z12Z13 212.000 VND

1 Gang 1 Way Switch
5 Pole Multi Function Socket

1. 16A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S400G-1G/M 138.000 VND

Door Bell Switch

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Switch Toggle: 40,000 times/Socket Toggle: 10,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S400GK13 216.000 VND

1 Gang Multi Control Switch

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 40,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S400GK23 336.000 VND

2 Gang Multi Control Switch

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 40,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S400GZ13/2NU 615.000 VND

USB Charging & Universal Socket

1. 2.1A/ 5V USB Charging
2. 16A/ 250V Universal Socket
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S400GZ12Z13/N 164.000 VND

5 Pole Multi Function Socket

1. 16A/250VAC -- 50/60Hz
2. Copper Class: Phosphor Bronze
3. Toggle: 10,000 times
4. Working Temperature: -20°C ~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm


S400G-1TEL **167.000 VND**

1 Telephone Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: $\geq 500\text{m}\Omega$
3. Electrical Specification: ELA/TIABI
4. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm \times 86mm


S400G-2TEL **203.000 VND**

2 Telephone Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: $\geq 500\text{m}\Omega$
3. Electrical Specification: ELA/TIABI
4. Connection Mode: T568A, T568B
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm \times 86mm


S400G-1TV **167.000 VND**

1 Tivi Socket

1. Impedance: 75 Ω
2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band ± 1.0 dB
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm \times 86mm


S400-2TV **203.000 VND**

2 Tivi Socket

1. Impedance: 75 Ω
2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band ± 1.0 dB
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm \times 86mm


S400G-1PC **225.000 VND**

1 Computer Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: $\geq 500\text{m}\Omega$
3. Electrical Specification: ELA/TIABI
4. Connection Mode: T568A, T568B
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm \times 86mm


S400G-2PC **305.000 VND**

2 Computer Socket

1. Temperature: -20 ~ 70°C
2. Insertion Resistance: $\geq 500\text{m}\Omega$
3. Electrical Specification: ELA/TIABI
4. Connection Mode: T568A, T568B
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm \times 86mm


S400-TVTEL **203.000 VND**

Tivi & Computer Socket

1. Impedance: 75 Ω
2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band ± 1.0 dB
1. Temperature: -20 ~ 70°C
2. Insertion Resistance: $\geq 500\text{m}\Omega$
3. Electrical Specification: ELA/TIABI
4. Connection Mode: T568A, T568B
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm \times 86mm


S400-TVPC **264.000 VND**

Tivi & Computer Socket

- TV :
1. Impedance: 75 Ω
 2. Insertion Loss: VHF3.5dB
UHF < 5dB, Flatness in band ± 1.0 dB
 3. Plastics: PC - Box: 10 set - Carton: 100 set
- COMPUTER:
1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: $\geq 500\text{m}\Omega$
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm \times 86mm


S400-TELPC **264.000 VND**

Telephone & Computer Socket

- Telephone:
1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: $\geq 500\text{m}\Omega$
 3. Electrical Specification: ELA/TIABI
1. Temperature: -20 ~ 70°C
 2. Insertion Resistance: $\geq 500\text{m}\Omega$
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm \times 86mm


S400-M/D **108.000 VND**

Blank Panel

1. Blank Panel
2. Plastics: PC - Box: 20 set - Carton: 200 set
Size: 86mm \times 86mm

S400

Come from the German that has long civilization and forerunner science and technology



S400GK20A 327.000 VND

20A Switch

1. 20A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 10,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size: 86mm × 86mm



S400GK45A 397.000 VND

45A Switch

1. 45A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 10,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size: 86mm × 86mm



S400G-1D/S 288.000 VND

Speed Control Switch

1. Working Voltage: 220V ~ 50Hz
2. Load Power: 25 ~ 300W
3. Minimum Starting Voltage: 90~110V
4. Load can be connected: Ceiling fan
5. Never connect the zero line
6. Plastics: PC - Box: 6 set - Carton: 60 set
- Size: 86mm × 86mm



S400-1D/G 288.000 VND

Dimmer Control Switch

1. Working Voltage: 220V ~ 50Hz
2. Maximum load power: 500W
3. Minimum Starting Voltage: 13~35V
4. Only for filament Lamp
5. Plastics: PC - Box: 6 set - Carton: 60 set
- Size: 86mm × 86mm



S400ZDC 1.128.000 VND

Shaver Charging Socket

1. 10A ~ 16A
2. Load Power: 1100 ~ 2400W
3. Working Voltage: 110V ~ 220V
4. Plastics: PC - Box: 6 set - Carton: 60 set
- Size: 86mm × 86mm



S400-1D/H 468.000 VND

Human Body Sensor Switch

1. Working Voltage: 220V ~ 50Hz
2. Load Power: Filament lamp 400W, fluorescent lamp, Electronic fluorescent lamp 200W
3. Delay time: 30 ~ 40s
4. Static Power: < 0.6W
5. Light sensitive environment: Daybreak/Nightfall/Evening
6. Range: Label angle 120°C
7. Plastics: PC - Box: 8 set - Carton: 80 set
- Size: 86mm × 86mm



S400G-1D/J 695.000 VND

Insert Card for Power On

1. Working Voltage: 30A/220V
2. Plastics: PC - Box: 6 set - Carton: 60 set
- Size: 86mm × 86mm



S400G-1D/JG 999.000 VND

Insert Card for Power On(High frequency)

1. Working Voltage: 30A/220V
2. Only high-frequency card insert into it can get power/frequency:13.56 MHz
3. other card is useless on it
6. Plastics: PC - Box: 6 set - Carton: 60 set
- Size: 86mm × 86mm



S400-3G/ML 685.000 VND

Don't Disturb & Please Clean & Door bell Switch

1. Working Voltage: 220V ~ 50Hz
2. No less than 500 MΩ
3. Maximum load power 5A
4. Plastics: PC - Box: 8 set - Carton: 80 set
- Size: 86mm × 86mm



S400DPGK22 330.000 VND

Don't Disturb & Please Clean Switch
(For S400G-3G/ML)

1. 10A/250VAC -- 50/60Hz
2. Contact Point: Silver 0.35mm - Purple Copper: 65% Cu
3. Switch Structure: Seesaw - Toggle: 40,000 times
4. Working Temperature: -20°C~ 70°C.
5. Plastics: PC - Box: 10 set - Carton: 100 set
- Size: 86mm × 86mm



S400-A/S

Step light

1. It is a light with sensor which you can install in the stair or corridor.
2. This light is influenced by the ambient light sense, and it will automatically sense the ambient light sense to decide whether to turn it on or not.
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S400GZ/S

Schuko Socket

1. 16A/250VAC--50/60Hz
2. Copper Class: Phosphor Bronze
3. Toggle: 10,000 times
4. Working Temperature: -20°C ~ 70°C,
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S400-1TV

StatelliteTV Socket

1. Impedance: 75 Ω
2. Insertion Loss: VHF < 3.5dB
UHF < 5dB, Flatness in band ±1.0 dB
3. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S400G-2USB3.1

Double USB Charging

1. 2.1A/ 5V USB Charging
2. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S400-F/L

SOS Enmergency Socket

- Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S400G-1D/K

Sound Control Delay Switch

1. Working Voltage: 220V ~ 50Hz
2. Load Power: Flamentlamp 400W, Fluorescent Lamps & LED Lamp 200W
3. Delay times: 60 ± 15s
4. Staric Power: < 0.6W
5. Sensifivity: 60 ~ 80db
6. Plastics: PC - Box: 8 set - Carton: 80 set
Size: 86mm × 86mm



S400-KZ13/N

216.000 VND

5 Pole Multi Function Socket

1. 16A/250VAC--50/60Hz
2. Copper Class: Phosphor Bronze
3. Toggle: 10,000 times
4. Working Temperature: -20°C ~ 70°C,
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm



S400-2KZ13/N

420.000 VND

5 Pole Multi Function Socket

1. 16A/250VAC--50/60Hz
2. Copper Class: Phosphor Bronze
3. Toggle: 10,000 times
4. Working Temperature: -20°C ~ 70°C,
5. Plastics: PC - Box: 10 set - Carton: 100 set
Size: 86mm × 86mm

Noble and elegant, a symbol of nobles;
Fashionable and exquisite

Gold

Z9
Series

UTEN



Z9

Come from the German that has long civilization and forerunner science and technology



Z9GK12 **430.000 VND**

1 Gang 2 Way Switch LED

- 1.10A/250VAC- 50/60Hz
- 2.Contact Point: Silver 0.35mm- Purple Copper:65% Cu
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm



Z9GK22 **612.000 VND**

2 Gang 2 Way Switch LED

- 1.10A/250VAC- 50/60Hz
- 2.Contact Point: Silver 0.35mm- Purple Copper:65% Cu
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm



Z9GK32 **792.000 VND**

3 Gang 2 Way Switch LED

- 1.10A/250VAC- 50/60Hz
- 2.Contact Point: Silver 0.35mm- Purple Copper:65% Cu
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm



Z9GK42 **980.000 VND**

4 Gang 2 Way Switch LED

- 1.10A/250VAC- 50/60Hz
- 2.Contact Point: Silver 0.35mm- Purple Copper:65% Cu
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm



Z9MD **388.000 VND**

Blank Panel

- 1.Blank Panel
- 2.Glass-box:20 sets- Carton:200 sets
- 4.Size:Size:86mm×86mm



Z9G-1GM **446.000 VND**

Door Bell Switch LED

- 1.10A/250VAC- 50/60Hz
- 2.Contact Point: Silver 0.35mm- Purple Copper:65% Cu
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm



Z9GK13 **612.000 VND**

1 Gang Multi Control Switch LED

- 1.10A/250VAC- 50/60Hz
- 2.Contact Point: Silver 0.35mm- Purple Copper:65% Cu
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm



Z9GK23 **830.000 VND**

2 Gang Multi Control Switch LED

- 1.10A/250VAC- 50/60Hz
- 2.Contact Point: Silver 0.35mm- Purple Copper:65% Cu
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm



Z9GK20A **710.000 VND**

20A Switch

- 1.20A/250VAC- 50/60Hz
- 2.Contact Point: Silver 0.35mm- Purple Copper:65% Cu
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm



Z9GK45A **830.000 VND**

45A Switch

- 1.45A/250VAC- 50/60Hz
- 2.Contact Point: Silver 0.35mm- Purple Copper:65% Cu
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm

Z9

Come from the German that has long civilization and forerunner science and technology



Z9GZ/S **690.000 VND**

Schuko Socket

- 1.16A /250VAC- 50/60Hz
- 2.Copper Class:Phosphor Bronze
- 3.Toggle:10,000 times
- 4.Working Temperature:- 20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm



Z9GZ12Z13/N **548.000 VND**

5 Pole Multi Function Socket

- 1.16A /250VAC- 50/60Hz
- 2.Copper Class:Phosphor Bronze
- 3.Toggle:10,000 times
- 4.Working Temperature:- 20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm



Z9GKZ12Z13/N **730.000 VND**

5 Pole Multi Function Socket With Switch

- 1.16A /250VAC- 50/60Hz
- 2.Copper Class:Phosphor Bronze
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times/ Socket Toggle:10,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm



Z9G-1TEL **548.000 VND**

1 Telephone Socket

- 1.Working Temperature:-20°C ~ 70°C
- 2.Insertion Resistance:≥500mΩ
- 3.Electrical Specification:ELA/TIABI
- 4.Glass- box:10 sets- Carton:100 sets
- Size:86mm×86mm



Z9G-2TEL **712.000 VND**

2 Telephone Socket

- 1.Working Temperature:-20°C ~ 70°C
- 2.Insertion Resistance:≥500mΩ
- 3.Electrical Specification:ELA/TIABI
- 4.Glass- box:10 sets- Carton:100 sets
- 5.Size:86mm×86mm



Z9G-1TV **548.000 VND**

1 TV Socket

- 1.Lmpedance:75Ω
- 2.Insertion Loss:VHF < 3.5dB, UHF < 5dB, Flatness in band ±1.0dB
- 3.Glass- box:10 sets- Carton:100 sets
- 4.Size:86mm×86mm



Z9G-2TV **712.000 VND**

2 TV Socket

- 1.Lmpedance:75Ω
- 2.Insertion Loss:VHF < 3.5dB, UHF < 5dB, Flatness in band ±1.0dB
- 3.Glass- box:10 sets- Carton:100 sets
- 4.Size:86mm×86mm



Z9G-1PC **676.000 VND**

1 Computer Socket

- 1.Working Temperature:-20°C ~ 70°C
- 2.Insertion Resistance:≥500mΩ
- 3.Electrical Specification:ELA/TIABI
- 4.Connection Mode: T568A, T568B
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm



Z9G-2PC **938.000 VND**

2 Computer Socket

- 1.Working Temperature:-20°C ~ 70°C
- 2.Insertion Resistance:≥500mΩ
- 3.Electrical Specification:ELA/TIABI
- 4.Connection Mode: T568A, T568B
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm



Z9TVTEL **676.000 VND**

TV & Telephone Socket

TV:

- 1.Lmpedance:75Ω
- 2.Insertion Loss:VHF < 3.5dB, UHF < 5dB, Flatness in band ±1.0dB

Telephone Socket:

- 1.Working Temperature:-20°C ~ 70°C
- 2.Insertion Resistance:≥500mΩ
- 3.Electrical Specification:ELA/TIABI
- 4.Glass- box:10 sets- Carton:100 sets
- 5.Size:86mm×86mm



Z9TVPC 770.000 VND

TV & Computer Socket

- TV:
1. Impedance: 75Ω
 2. Insertion Loss: VHF < 3.5dB, UHF < 5dB, Flatness in band ±1.0dB

- Computer:
1. Working Temperature: -20°C ~ 70°C
 2. Insertion Resistance: ≥ 500mΩ
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Glass- box: 10 sets- Carton: 100 sets
 6. Size: 86mm×86mm



Z9TELPC 770.000 VND

Telephone & Computer Socket

- Telephone Socket:
1. Working Temperature: -20°C ~ 70°C
 2. Insertion Resistance: ≥ 500mΩ
 3. Electrical Specification: ELA/TIABI

- Computer:
1. Working Temperature: -20°C ~ 70°C
 2. Insertion Resistance: ≥ 500mΩ
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Glass- box: 10 sets- Carton: 100 sets
 6. Size: 86mm×86mm



Z9GZ13/2NU 1.600.000 VND

3 Pole Universal Socket with Double USB

1. 2.1A/5V USB Charging
2. 16A/250V Universal Socket
3. Glass- box: 10 sets- Carton: 100 sets
4. Size: 86mm×86mm



Z9G-1D/G 876.000 VND

Dimmer Control Switch

1. Working Voltage: 220V ~ 50Hz
2. Maximum Load Power: 500W
3. Minimum Starting Voltage: 13V ~ 35V
4. Only for filament Lamp
5. Glass- box: 8 sets- Carton: 80 sets
6. Size: 86mm×86mm



Z9G-1D/S 876.000 VND

Speed Control Switch

1. Working Voltage: 220V ~ 50Hz
2. Load Power: 25 ~ 300W
3. Minimum Starting Voltage: 90V ~ 110V
4. Load can be connected: Ceiling Fan
5. Never connect the zero line
6. Glass- box: 8 sets- Carton: 80 sets
7. Size: 86mm×86mm



Z9G-1D/Y 972.000 VND

Sound Control Switch

1. Signal frequency range: 100Hz ~ 20kHz
2. Rated Load impedance: 8Ω
3. Rated Input Power: 5W
5. Glass- box: 8 sets- Carton: 80 sets
6. Size: 86mm×86mm



Z9ZDC 2.865.000 VND

Shaver Charging Socket

1. 10A ~ 16A
2. Load Power: 1100W ~ 2400W
3. Working Voltage: 110V ~ 220V
4. Glass- box: 7 sets- Carton: 70 sets
5. Size: 86mm×86mm



Z9G-3G/ML 1.680.000 VND

Don't Disturb & Please Clean & Door bell Switch

1. Working Voltage: 220V ~ 50Hz
2. No Less than 500mΩ
3. Maximum Load Power: 5A
5. Glass- box: 8 sets- Carton: 80 sets
6. Size: 86mm×86mm



Z9DPGK22 810.000 VND

2 Gang Switch & Please Clean & Do not Disturb

1. Working Voltage: 16A/250V
2. 1 Gang Please Clean Switch
3. 1 Gang Do not Disturb Switch
4. Glass- box: 10 sets- Carton: 100 sets
5. Size: 86mm×86mm



Z9G-1D/J 2.732.000 VND

Insert Card for Power On

1. Working Voltage: 30A/220V
2. Glass- box: 10 sets- Carton: 100 sets
3. Size: 86mm×86mm
4. Glass- box: 8 sets- Carton: 80 sets
5. Size: 86mm×86mm

Z9

Come from the German that has long civilization and forerunner science and technology



Z9G-1D/JG 3.332.000 VND

Insert Card for Power On(High frequency)

- 1.Working Voltage:30A/220V
- 2.Only High-Frequency card insert into it can get power/Frequency:13.56MHz
- 3.Other Card is useless on it
- 4.Glass- box:8 sets- Carton:80 sets
- 5.Size:86mm x 86mm



Z9G-1D/H 1.780.000 VND

Human Body Sensor Switch

- 1.Working Voltage:220V ~ 50Hz
- 2.Load Power: Filament Lamp 400W, Fluorescent Lamp, Electronic Fluorescent Lamp 200W
- 3.Delay time:30 ~ 40s
- 4.Static Power: < 0.6W
- 5.Light sensitive environment:Daybreak/Nightfall/Evening
- 6.Range:Lebel angel 120°
- 7.Glass- box:8 sets- Carton:80 sets
- 8.Size:86mm x 86mm



Z9G-1D/C 1.468.000 VND

Touch Delay Switch

- 1.Working Voltage:220V ~ 50Hz
- 2.Current:5A
- 3.Delay time : 30±10s
- 4.Static Currents:70UA(RMS)
- 5.Load Power: Filament Lamp, Fluorescent Lamp, Electronic Fluorescent Lamp
- 6.Glass- box:8 sets- Carton:80 sets
- 7.Size:86mm x 86mm



Z9KZ13/N 1.500.000 VND

13A Single Socket with Switch+ USB


- 1.13A/250VAC- 50/60Hz
- 2.Copper Class:Phosphor Bronze
- 3.Toggle: 10,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:8 sets- Carton:80 sets
- 6.Size:86mm x 86mm



Z9-M/2M 89.000 VND

Double Panel with bracket

Plastics: PC
Size:147mm x 90mm



Z9-M/3M 129.000 VND

Triple Panel with bracket

Plastics: PC
Size:260mm x 90mm



Z9-M/4M 169.000 VND

Quadruple Panel with bracket

Size:346mm x 90mm



Z9-M/5M 219.000 VND

Quintuple Panel with bracket

Size:432mm x 90mm



Noble and elegant,a symbol of nobles;
Fashionable and exquisite

Gray

Z9
Series

Z9

Come from the German that has long civilization and forerunner science and technology


Z9GK12
430.000 VND
1 Gang 2 Way Switch LED

- 1.10A/250VAC- 50/60Hz
- 2.Contact Point: Silver 0.35mm- Purple Copper:65% Cu
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm


Z9GK22
612.000 VND
2 Gang 2 Way Switch LED

- 1.10A/250VAC- 50/60Hz
- 2.Contact Point: Silver 0.35mm- Purple Copper:65% Cu
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm


Z9GK32
792.000 VND
3 Gang 2 Way Switch LED

- 1.10A/250VAC- 50/60Hz
- 2.Contact Point: Silver 0.35mm- Purple Copper:65% Cu
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm


Z9GK42
980.000 VND
4 Gang 2 Way Switch LED

- 1.10A/250VAC- 50/60Hz
- 2.Contact Point: Silver 0.35mm- Purple Copper:65% Cu
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm


Z9MD
388.000 VND
Blank Panel

- 1.Blank Panel
- 2.Glass-box:20 sets- Carton:200 sets
- 4.Size:86mm×86mm


Z9G-1GM
446.000 VND
Door Bell Switch LED

- 1.10A/250VAC- 50/60Hz
- 2.Contact Point: Silver 0.35mm- Purple Copper:65% Cu
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm


Z9GK13
612.000 VND
1 Gang Multi Control Switch LED

- 1.10A/250VAC- 50/60Hz
- 2.Contact Point: Silver 0.35mm- Purple Copper:65% Cu
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm


Z9GK23
830.000 VND
2 Gang Multi Control Switch LED

- 1.10A/250VAC- 50/60Hz
- 2.Contact Point: Silver 0.35mm- Purple Copper:65% Cu
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm


Z9GK20A
710.000 VND
20A Switch

- 1.20A/250VAC- 50/60Hz
- 2.Contact Point: Silver 0.35mm- Purple Copper:65% Cu
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton: 100 sets
- 6.Size:86mm × 86mm


Z9GK45A
830.000 VND
45A Switch

- 1.45A/250VAC- 50/60Hz
- 2.Contact Point: Silver 0.35mm- Purple Copper:65% Cu
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm × 86mm



Z9GZ/S 690.000 VND

Schuko Socket

- 1.16A /250VAC- 50/60Hz
- 2.Copper Class:Phosphor Bronze
- 3.Toggle:10,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm



Z9GZ12Z13/N 548.000 VND

5 Pole Multi Function Socket

- 1.16A /250VAC- 50/60Hz
- 2.Copper Class:Phosphor Bronze
- 3.Toggle:10,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm



Z9GKZ12Z13/N 730.000 VND

5 Pole Multi Function Socket With Switch

- 1.16A /250VAC- 50/60Hz
- 2.Copper Class:Phosphor Bronze
- 3.Switch Structure:Seesaw- Switch Toggle:40,000 times/ Socket Toggle:10,000 times
- 4.Working Temperature:-20°C ~ 70°C
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm



Z9G-1TEL 548.000 VND

1 Telephone Socket

- 1.Working Temperature:-20°C ~ 70°C
- 2.Insertion Resistance:≥500mΩ
- 3.Electrical Specification:ELA/TIABI
- 4.Glass- box:10 sets- Carton:100 sets
- Size:86mm×86mm



Z9G-2TEL 712.000 VND

2 Telephone Socket

- 1.Working Temperature:-20°C ~ 70°C
- 2.Insertion Resistance:≥500mΩ
- 3.Electrical Specification:ELA/TIABI
- 4.Glass- box:10 sets- Carton:100 sets
- 5.Size:86mm×86mm



Z9G-1TV 548.000 VND

1 TV Socket

- 1.Lmpedance:75Ω
- 2.Insertion Loss:VHF < 3.5dB, UHF < 5dB, Flatness in band ±1.0dB
- 3.Glass- box:10 sets- Carton:100 sets
- 4.Size:86mm×86mm



Z9G-2TV 712.000 VND

2 TV Socket

- 1.Lmpedance:75Ω
- 2.Insertion Loss:VHF < 3.5dB, UHF < 5dB, Flatness in band ±1.0dB
- 3.Glass- box:10 sets- Carton:100 sets
- 4.Size:86mm×86mm



Z9G-1PC 676.000 VND

1 Computer Socket

- 1.Working Temperature:-20°C ~ 70°C
- 2.Insertion Resistance:≥500mΩ
- 3.Electrical Specification:ELA/TIABI
- 4.Connection Mode: T568A, T568B
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm



Z9G-2PC 938.000 VND

2 Computer Socket

- 1.Working Temperature:-20°C ~ 70°C
- 2.Insertion Resistance:≥500mΩ
- 3.Electrical Specification:ELA/TIABI
- 4.Connection Mode: T568A, T568B
- 5.Glass- box:10 sets- Carton:100 sets
- 6.Size:86mm×86mm



Z9TVTEL 676.000 VND

TV & Telephone Socket

- TV:
- 1.Lmpedance:75Ω
 - 2.Insertion Loss:VHF < 3.5dB, UHF < 5dB, Flatness in band ±1.0dB
- Telephone Socket:
- 1.Working Temperature:-20°C ~ 70°C
 - 2.Insertion Resistance:≥500mΩ
 - 3.Electrical Specification:ELA/TIABI
 - 4.Glass- box:10 sets- Carton:100 sets
 - 5.Size:86mm×86mm

Z9

Come from the German that has long civilization and forerunner science and technology



Z9TVPC **770.000 VND**

TV & Computer Socket

- TV:
1. Impedance: 75Ω
 2. Insertion Loss: VHF < 3.5dB, UHF < 5dB, Flatness in band ±1.0dB

- Computer:
1. Working Temperature: -20°C ~ 70°C
 2. Insertion Resistance: ≥500mΩ
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Glass- box: 10 sets- Carton: 100 sets
 6. Size: 86mm × 86mm



Z9TELPC **770.000 VND**

Telephone & Computer Socket

- Telephone Socket:
1. Working Temperature: -20°C ~ 70°C
 2. Insertion Resistance: ≥500mΩ
 3. Electrical Specification: ELA/TIABI

- Computer:
1. Working Temperature: -20°C ~ 70°C
 2. Insertion Resistance: ≥500mΩ
 3. Electrical Specification: ELA/TIABI
 4. Connection Mode: T568A, T568B
 5. Glass- box: 10 sets- Carton: 100 sets
 6. Size: 86mm × 86mm



Z9GZ13/2NU **1.600.000 VND**

3 Pole Universal Socket with Double USB

1. 2.1A/5V USB Charging
2. 16A/250V Universal Socket
3. Glass- box: 10 sets- Carton: 100 sets
4. Size: 86mm × 86mm



Z9G-1D/G **876.000 VND**

Dimmer Control Switch

1. Working Voltage: 220V ~ 50Hz
2. Maximum Load Power: 500W
3. Minimum Staring Voltage: 13V ~ 35V
4. Only for filament Lamp
5. Glass- box: 8 sets- Carton: 80 sets
6. Size: 86mm × 86mm



Z9G-1D/S **876.000 VND**

Speed Control Switch

1. Working Voltage: 220V ~ 50Hz
2. Load Power: 25 ~ 300W
3. Minimum Staring Voltage: 90V ~ 110V
4. Load can be connected: Ceiling Fan
5. Never connect the zero line
6. Glass- box: 8 sets- Carton: 80 sets
7. Size: 86mm × 86mm



Z9G-1D/Y **972.000 VND**

Sound Control Switch

1. Signal frequency range: 100Hz ~ 20kHz
2. Rated Load impedance: 8Ω
3. Rated Input Power: 5W
5. Glass- box: 8 sets- Carton: 80 sets
6. Size: 86mm × 86mm



Z9ZDC **2.865.000 VND**

Shaver Charging Socket

1. 10A ~ 16A
2. Load Power: 1100W ~ 2400W
3. Working Voltage: 110V ~ 220V
4. Glass- box: 7 sets- Carton: 70 sets
5. Size: 86mm × 86mm



Z9G-3G/ML **1.680.000 VND**

Don't Disturb & Please Clean & Door bell Switch

1. Working Voltage: 220V ~ 50Hz
2. No Less than 500mΩ
3. Maximum Load Power: 5A
5. Glass- box: 8 sets- Carton: 80 sets
6. Size: 86mm × 86mm



Z9DPGK22 **810.000 VND**

2 Gang Switch & Please Clean & Do not Disturb

1. Working Voltage: 16A/250V
2. 1 Gang Please Clean Switch
3. 1 Gang Do not Disturb Switch
4. Glass- box: 10 sets- Carton: 100 sets
5. Size: 86mm × 86mm



Z9G-1D/J **2.732.000 VND**

Insert Card for Power On

1. Working Voltage: 30A/220V
2. Glass- box: 10 sets- Carton: 100 sets
3. Size: 86mm × 86mm
4. Glass- box: 8 sets- Carton: 80 sets
5. Size: 86mm × 86mm



Z9G-1D/JG 3.332.000 VND

Insert Card for Power On(High frequency)

- 1.Working Voltage:30A/220V
- 2.Only High-Frequency card insert into it can get power/Frequency:13.56MHz
- 3.Other Card is useles on it
- 4.Glass- box:8 sets- Carton:80 sets
- 5.Size:86mm×86mm



Z9G-1D/H 1.780.000 VND

Human Body Sensor Switch

- 1.Working Voltage:220V~50Hz
- 2.Load Power: Filament Lamp 400W, Fluorescent Lamp, Electronic Fluorescent Lamp 200W
- 3.Delay time:30~40s
- 4.Static Power:<0.6W
- 5.Light sensitive environment:Daybreak/Nightfall/Evening
- 6.Range:Lebel angel 120°
- 7.Glass- box:8 sets- Carton:80 sets
- 8.Size:86mm×86mm



Z9G-1D/C 1.468.000 VND

Touch Delay Switch


- 1.Working Voltage:220V~50Hz
- 2.Current:5A
- 3.Delay time : 30±10s
- 4.Staric Currents:70UA(RMS)
- 5.Load Power: Filament Lamp, Fluorescent Lamp, Electronic Fluorescent Lamp
- 6.Glass- box:8 sets- Carton:80 sets
- 7.Size:86mm×86mm



Z9KZ13/N 1.500.000 VND

13A Single Socket with Switch+ USB


- 1.13A/250VAC- 50/60Hz
- 2.Copper Class:Phosphor Bronze
- 3.Toggle: 10,000 times
- 4.Wokring Temperature:-20°C~70°C
- 5.Glass- box:8 sets- Carton:80 sets
- 6.Size:86mm×86mm



Z9-M/2M 89.000 VND

Doubel Panle with bracket


Plastics: PC
Size:147mm × 90mm



Z9-M/3M 129.000 VND

Triple Panel with bracket

Plastics: PC
Size:260mm × 90mm



Z9-M/4M 169.000 VND

Quadruple Panel with bracket

Size:346mm × 90mm



Z9-M/5M 219.000 VND

Quintuple Panel with bracket

Size:432mm × 90mm



M5-A104T **435,000^{VND}**
Circuit Breakers Box, 2P - 4P
 1. Size: 140x170x15,5 (mm) Cut: 118x150x90(mm)
 2. Material: ABS fireproof plastic, transparent window
 3. Box is Powder coated metal



M5-A104M **435,000^{VND}**
Circuit Breakers Box, 2P - 4P
 1. Size: 140x170x15,5 (mm) Cut: 118x150x90(mm)
 2. Material: ABS fireproof plastic, coated window
 3. Box is Powder coated metal



M5-A107T **750,000^{VND}**
Circuit Breakers Box, 5P - 7P
 1. Size: 224x240x15,5 (mm) Cut: 202x210x90(mm)
 2. Material: ABS fireproof plastic, transparent window
 3. Box is Powder coated metal



M5-A107M **750,000^{VND}**
Circuit Breakers Box, 5P - 7P
 1. Size: 224x240x15,5 (mm) Cut: 202x210x90(mm)
 2. Material: ABS fireproof plastic, coated window
 3. Box is Powder coated metal



M5-A110T **885,000^{VND}**
Circuit Breakers Box, 8P - 10P
 1. Size: 278x240x15,5 (mm) Cut: 256x210x90(mm)
 2. Material: ABS fireproof plastic, transparent window
 3. Box is Powder coated metal



M5-A110M **885,000^{VND}**
Circuit Breakers Box, 8P - 10P
 1. Size: 278x240x15,5 (mm) Cut: 256x210x90(mm)
 2. Material: ABS fireproof plastic, coated window
 3. Box is Powder coated metal



M5-A112T **980,000^{VND}**
Circuit Breakers Box, 10P - 12P
 1. Size: 316x240x15,5 (mm) Cut: 292x210x90(mm)
 2. Material: ABS fireproof plastic, transparent window
 3. Box is Powder coated metal



M5-A112M **980,000^{VND}**
Circuit Breakers Box, 10P - 12P
 1. Size: 316x240x15,5 (mm) Cut: 292x210x90(mm)
 2. Material: ABS fireproof plastic, coated window
 3. Box is Powder coated metal



M5-A115T **995,000^{VND}**
Circuit Breakers Box, 13P - 15P
 1. Size: 370x240x15,5 (mm) Cut: 346x220x90(mm)
 2. Material: ABS fireproof plastic, transparent window
 3. Box is Powder coated metal



M5-A115M **995,000^{VND}**
Circuit Breakers Box, 13P - 15P
 1. Size: 370x240x15,5 (mm) Cut: 346x220x90(mm)
 2. Material: ABS fireproof plastic, coated window
 3. Box is Powder coated metal



M5-A118T **1,150,000^{VND}**
Circuit Breakers Box, 16P - 18P
 1. Size: 424x260x15,5 (mm) Cut: 400x220x90(mm)
 2. Material: ABS fireproof plastic, transparent window
 3. Box is Powder coated metal



M5-A118M **1,150,000^{VND}**
Circuit Breakers Box, 16P - 18P
 1. Size: 424x260x15,5 (mm) Cut: 400x220x90(mm)
 2. Material: ABS fireproof plastic, coated window
 3. Box is Powder coated metal



M5-A224T **2,595,000^{VND}**
Circuit Breakers Box, 20P - 24P
 1. Size: 335x460x19 (mm) Cut: 305x420x90(mm)
 2. Material: ABS fireproof plastic, transparent window
 3. Box is Powder coated metal



M5-A224M **2,595,000^{VND}**
Circuit Breakers Box, 20P - 24P
 1. Size: 335x460x19 (mm) Cut: 305x420x90(mm)
 2. Material: ABS fireproof plastic, coated window
 3. Box is Powder coated metal



MCB 1P 6kA 400V C curve



Code	I_n	Price
N8BH1P10A	10A	122,000 ^{VND}
N8BH1P16A	16A	122,000 ^{VND}
N8BH1P20A	20A	122,000 ^{VND}
N8BH1P25A	25A	122,000 ^{VND}
N8BH1P32A	32A	122,000 ^{VND}
N8BH1P40A	40A	182,000 ^{VND}
N8BH1P50A	50A	182,000 ^{VND}

RCCB 30mA 240-415V AC type



Code	I_n	Price
N8LGM2P25A	25A	1,029,000 ^{VND}
N8LGM2P32A	32A	1,080,000 ^{VND}
N8LGM2P40A	40A	1,159,000 ^{VND}
N8LGM2P63A	63A	1,357,000 ^{VND}

MCB 2P 6kA 400V C curve



Code	I_n	Price
N8BH2P20A	20A	378,000 ^{VND}
N8BH2P25A	25A	378,000 ^{VND}
N8BH2P32A	32A	378,000 ^{VND}
N8BH2P40A	40A	378,000 ^{VND}
N8BH2P50A	50A	655,000 ^{VND}
N8BH2P63A	63A	655,000 ^{VND}
$I_{cu} = 10kA$		
N8GH2P80A	80A	1,210,000 ^{VND}

RCBO 1P + N 6kA 30mA



Code	I_n	Price
SL6N1PN10A	10A	895,000 ^{VND}
SL6N1PN16A	16A	895,000 ^{VND}
SL6N1PN20A	20A	895,000 ^{VND}
SL6N1PN25A	25A	895,000 ^{VND}
SL6N1PN32A	32A	895,000 ^{VND}
SL6N1PN25A	40A	895,000 ^{VND}
SL6N1PN25A	50A	895,000 ^{VND}
SL6N1PN25A	63A	895,000 ^{VND}

MCB 3P 6kA 230/400V C curve



Code	I_n	Price
N8BH3P25A	25A	910,000 ^{VND}
N8BH3P32A	32A	910,000 ^{VND}
N8BH3P40A	40A	1,018,000 ^{VND}
N8BH3P50A	50A	1,018,000 ^{VND}
N8BH3P63A	63A	1,018,000 ^{VND}
$I_{cu} = 10kA$		
N8GH3P80A	80A	2,015,000 ^{VND}
N8GH3P100A	100A	2,015,000 ^{VND}

MCCB 3P 25kA 410/415V



Code	I_n	Price
EM125N3P25A	25A	2,159,000 ^{VND}
EM125N3P32A	32A	2,159,000 ^{VND}
EM125N3P40A	40A	2,159,000 ^{VND}
EM125N3P50A	50A	2,159,000 ^{VND}
EM125N3P63A	63A	2,159,000 ^{VND}
EM125N3P80A	80A	2,159,000 ^{VND}
EM125N3P100A	100A	2,159,000 ^{VND}
EM125N3P125A	125A	2,439,000 ^{VND}

LED CHIP: OSRAM - GERMANY



Model	Dimension(mm)	Cut out(mm)	Power	Luminous flux	Packing (mm)
L02211-6A	Φ110x36	Φ75	6W	480lm	50 pcs/CTN
L02212-8A	Φ120x36	Φ90	8W	640lm	50 pcs/CTN
L02212-10A	Φ120x36	Φ90	10W	800lm	50 pcs/CTN
L02213-12A	Φ140x36	Φ110	12W	960lm	40 pcs/CTN
L02213-15A	Φ140x36	Φ110	15W	1200lm	40 pcs/CTN

Structure and characteristics

1 Optics


- High quality diuser ensures high light transmittance and even light output
- Light outlet angle 110°

2 Light source

- International famous branded SMD chip
- High CRI and lumen output, Good color saturation and delity

3 Driver

- External constant current driver
- Conforming to LVD and EMC

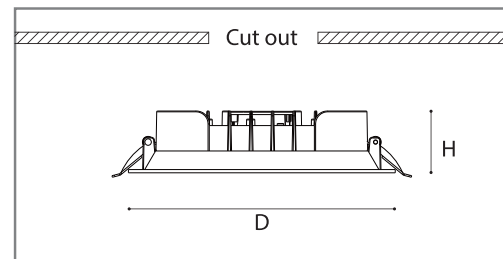

4 Lamp body

- High quality Ineegrated die-cast design heatsink
- Excellent appearcance and heat dissipation

Applications:

Hotel, club, supermarket, store, office ,residential, commercial and etc.

Product Features:

, CRI>80/90,

- 1.Quality famous branded LED SMD chip, high luminous efficiency lower thermal diffusivity to provide uniform & comfortable light layout.
- 2.Patented appearance design. High quality aluminum heat sink to ensure ingenious shape and increase heat dissipation space.
- 3.High quality imported acrylic diffuser to achieve uniform light and high lumen.
- 4.High quality isolated constant current driver fixed on housing to ensure efficient installation.
- 5.Dimensions range from 2.5"-8", Powers ranging from 8W-40W.
- 6.Lifespan up to 35,000 hours, 3/5 years warranty.

LED CHIP: OSRAM - GERMANY



L02211-6A



3000K - 4000K - 6500K
3 STEP CCT TURNABLE

Power : 6W

Input: AC 220V-240V / 50-60Hz

Material: Aluminum

Color: white powder coating

425.000 VND

495.000 VND

L02212-8A



3000K - 4000K - 6500K
3 STEP CCT TURNABLE

Power : 8W

Input: AC 220V-240V / 50-60Hz

Material: Aluminum

Color: white powder coating

525.000 VND

595.000 VND

L02212-10A



3000K - 4000K - 6500K
3 STEP CCT TURNABLE

Power : 10W

Input: AC 220V-240V / 50-60Hz

Material: Aluminum

Color: white powder coating

565.000 VND

625.000 VND

L02213-12A



3000K - 4000K - 6500K
3 STEP CCT TURNABLE

Power : 12W

Input: AC 220V-240V / 50-60Hz

Material: Aluminum

Color: white powder coating

589.000 VND

675.000 VND

L02213-15A



3000K - 4000K - 6500K
3 STEP CCT TURNABLE

Power : 15W

Input: AC 220V-240V / 50-60Hz

Material: Aluminum

Color: white powder coating

599.000 VND

710.000 VND